



# Neutrino Factories and Beta Beams: Concepts, Challenges, and R&D

Michael S. Zisman  
Center for Beam Physics  
Lawrence Berkeley National Laboratory

EPAC06-Edinburgh  
June 30, 2006



# Introduction

---



- Discovery of **neutrino oscillations** led to strong interest in providing **intense beams of accelerator-produced neutrinos**
  - such a facility may be able to observe **CP violation** in the lepton sector
    - the reason we're all here
- Two ideas have been proposed for producing the required neutrino beams
  - a **Neutrino Factory** based on the decays of a stored **muon beam**
  - a **Beta Beam** facility based on decays of a stored beam of **beta-unstable ions**
- Both approaches are challenging!

- Neutrino Factory beam properties

$$\mu^- \rightarrow e^- \bar{\nu}_e \nu_\mu \Rightarrow 50\% \bar{\nu}_e + 50\% \nu_\mu$$

$$\mu^+ \rightarrow e^+ \nu_e \bar{\nu}_\mu \Rightarrow 50\% \nu_e + 50\% \bar{\nu}_\mu$$

Produces high energy neutrinos

- Beta beam properties

- ${}^6\text{He} \rightarrow {}^6\text{Li} + e^- + \bar{\nu}_e$

- ${}^{18}\text{Ne} \rightarrow {}^{18}\text{F} + e^+ + \nu_e$

Produces low energy neutrinos

- Decay kinematics well known

- minimal hadronic uncertainties in the spectrum and flux

- Electron neutrinos are most favorable to do the science

- $\nu_e \rightarrow \nu_\mu$  oscillations give easily detectable “wrong-sign”  $\mu$

- do not get  $\nu_e$  from “conventional” neutrino beam line ( $\pi \rightarrow \mu + \nu_\mu$ )

# Neutrino Factory

- Neutrino Factory comprises these sections

- Proton Driver

- primary beam on production target

- Target, Capture, and Decay

- create  $\pi$ ; decay into  $\mu \Rightarrow$  **MERIT**

- Bunching and Phase Rotation

- reduce  $\Delta E$  of bunch

- Cooling

- reduce transverse emittance


$\Rightarrow$  **MICE**

- Acceleration

- 130 MeV  $\rightarrow$  20-40 GeV  
with RLAs or FFAGs

- Decay Ring

- store for 500 turns;  
long straight(s)

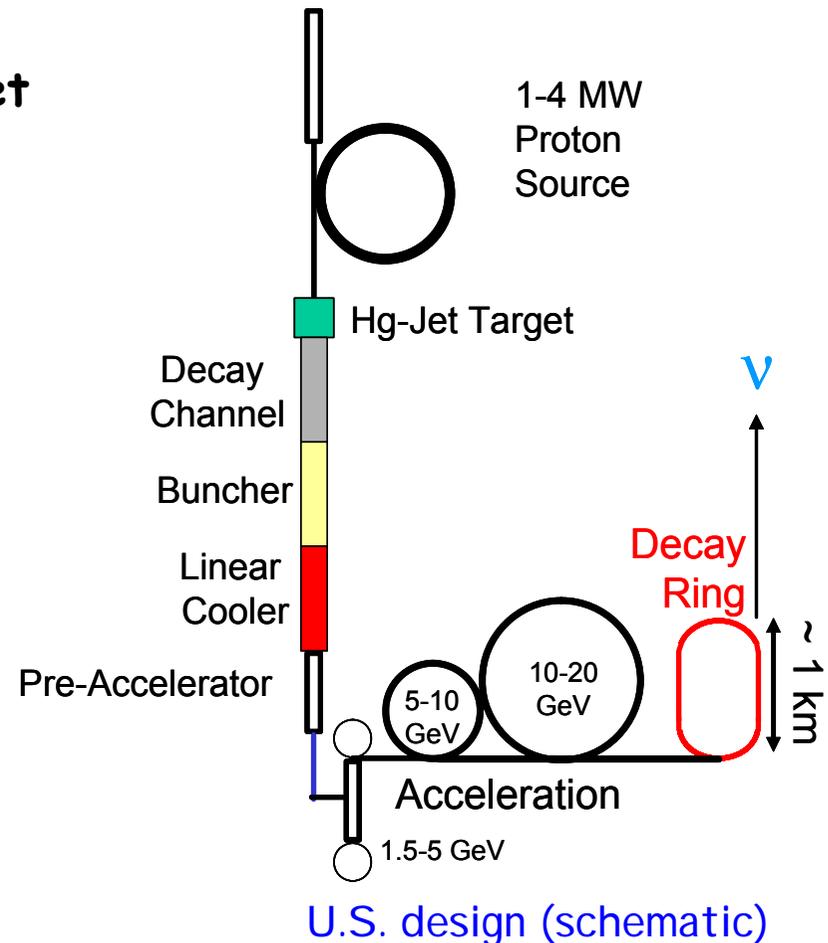

- **Baseline Beta Beam facility comprises these sections**

- **Proton Driver**

- SPL ( $\approx 4$  GeV)

- **ISOL Target**

- spallation neutrons or direct protons

- **Ion Source**

- pulsed ECR

- **Acceleration**


- linac, RCS, PS, SPS

- **Decay Ring**

- 7000 m; 2500 m straight

Baseline concept assumes CERN PS, SPS


Use of Tevatron also being considered

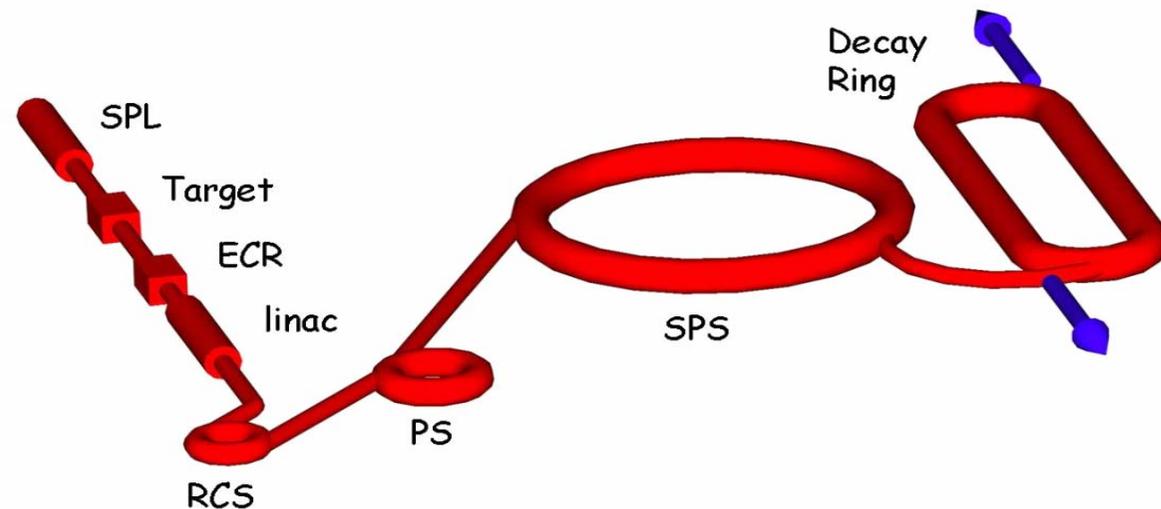

- **Muons created as tertiary beam ( $p \rightarrow \pi \rightarrow \mu$ )**
  - **low production rate**
    - need target that can tolerate multi-MW beam
  - **large energy spread and transverse phase space**
    - need emittance cooling
    - high-acceptance acceleration system and decay ring
  
- **Muons have short lifetime ( $2.2 \mu\text{s}$  at rest)**
  - **puts premium on rapid beam manipulations**
    - high-gradient RF cavities (in magnetic field for cooling)
    - presently untested **ionization cooling** technique
    - fast acceleration system

# Ionization Cooling (1)

- Ionization cooling analogous to familiar SR damping process in electron storage rings
  - energy loss (SR or  $dE/dx$ ) reduces  $p_x, p_y, p_z$
  - energy gain (RF cavities) restores only  $p_z$
  - repeating this reduces  $p_{x,y}/p_z$

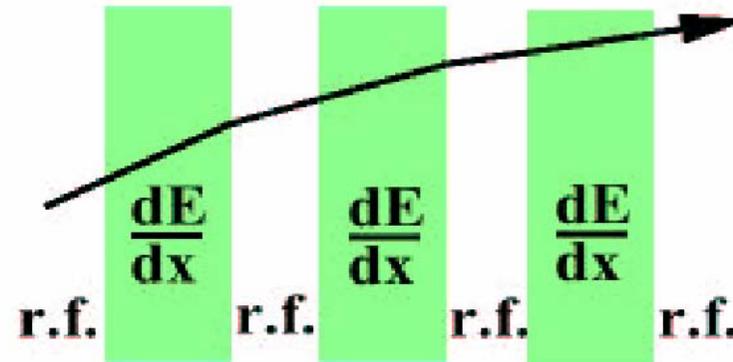

- There is also a heating term
  - for SR it is quantum excitation
  - for ionization cooling it is multiple scattering
- Balance between heating and cooling gives equilibrium emittance

$$\frac{d\epsilon_N}{ds} = - \frac{1}{\beta^2} \left| \frac{dE_\mu}{ds} \right| \frac{\epsilon_N}{E_\mu} + \frac{\beta_\perp (0.014 \text{ GeV})^2}{2 \beta^3 E_\mu m_\mu X_0}$$

Cooling


Heating

$$\epsilon_{x,N, \text{equil.}} = \frac{\beta_\perp (0.014 \text{ GeV})^2}{2 \beta m_\mu X_0 \left| \frac{dE_\mu}{ds} \right|}$$

— prefer low  $\beta_\perp$  (strong focusing), large  $X_0$  and  $dE/ds$  ( $H_2$  is best)

# Proton Parameters


- **Desired proton intensity for Neutrino Factory is 4 MW**
  - e.g.,  $2.5 \times 10^{15}$  p/s at 10 GeV or  $5 \times 10^{13}$  p/pulse at 50 Hz
- **Desired bunch length is 1-3 ns to minimize intensity loss**
  - not easily done at high intensity and moderate energy

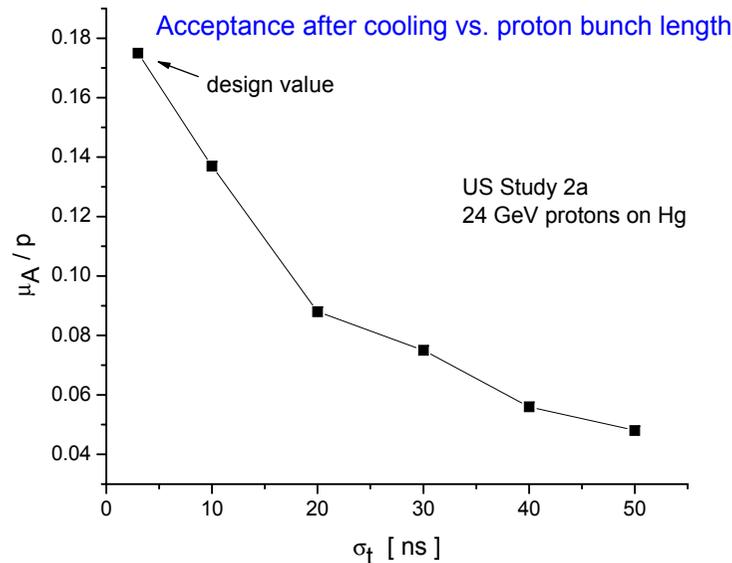



Pulse structure is also important—target issue

# NF Target

- Favored target concept based on Hg jet in 20-T solenoid
  - jet velocity of 20 m/s establishes “new” target each beam pulse

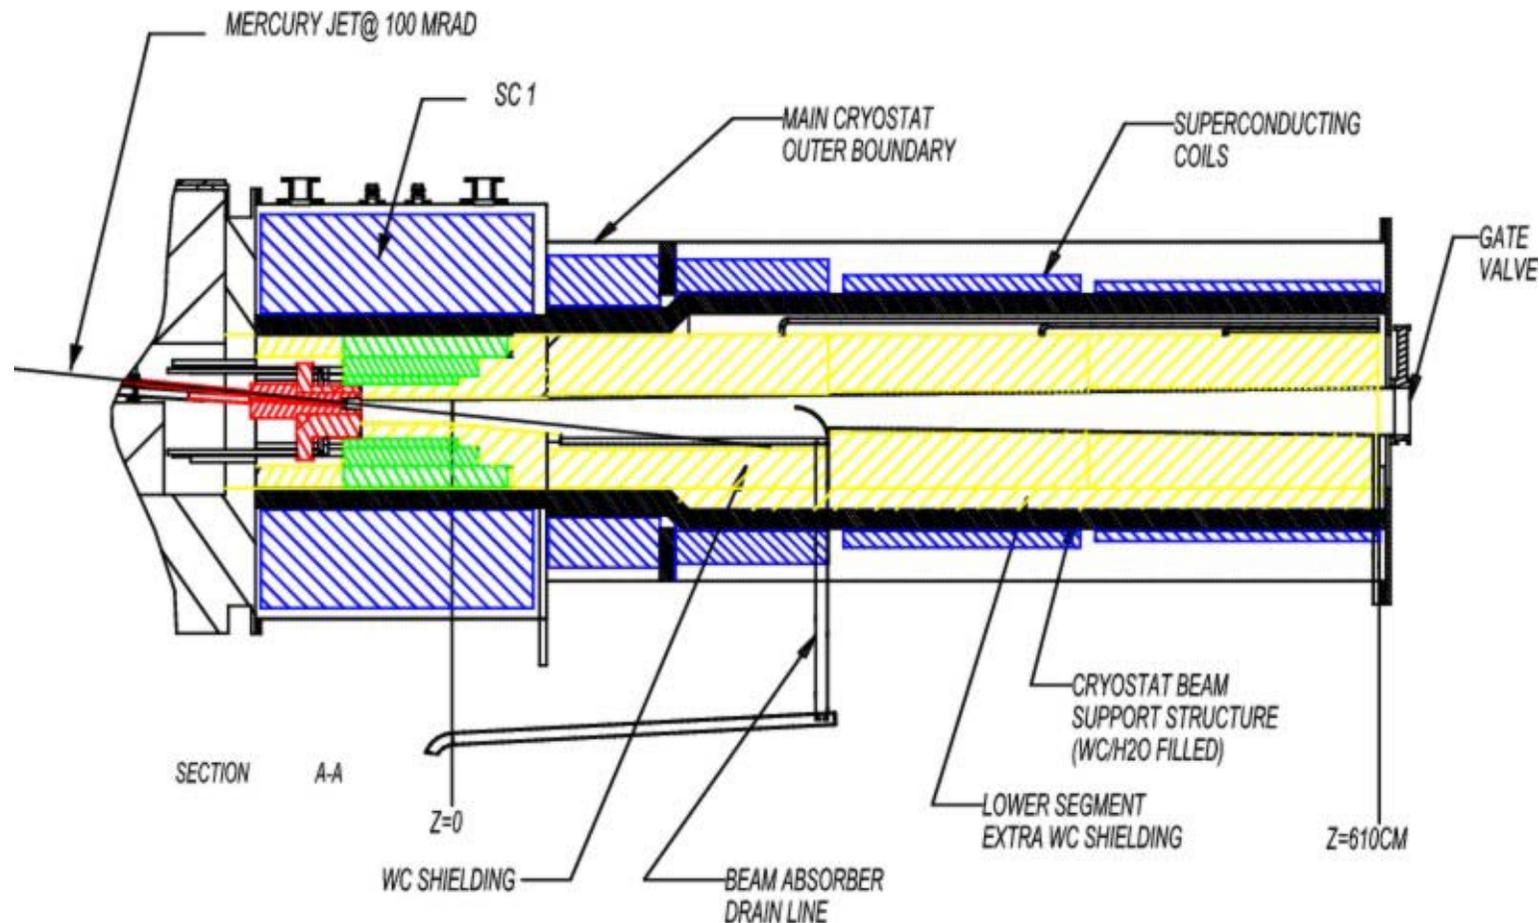

- Cooling channel requires high-gradient RF in a strong magnetic field
  - 805 MHz experiments indicate substantial degradation of gradient in such conditions

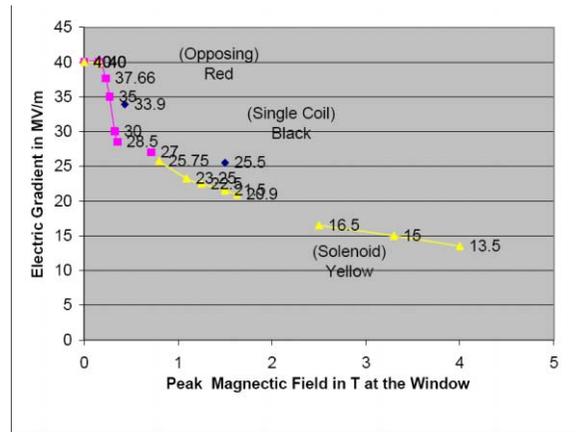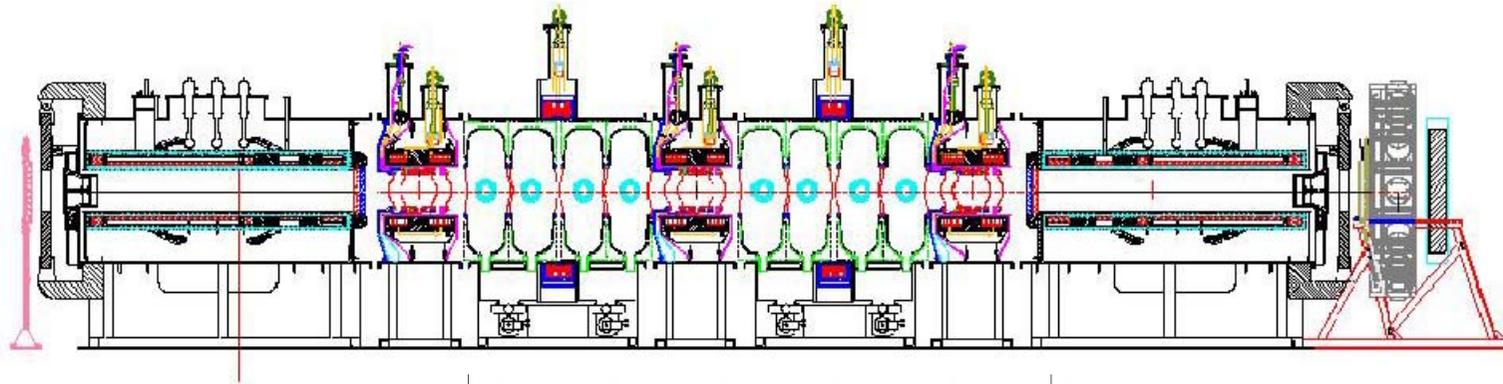

- Production of the required ion species at the required intensity
  - requires production, transport to ion source, ionization, bunching
    - target's ability to accommodate primary beam is sometimes limited to a few hundred kW
  - looks okay for  ${}^6\text{He}$  but  ${}^{18}\text{Ne}$  is presently estimated at about 4% of desired intensity level
    - higher  $Z$  atoms are produced in multiple charge states, with the peak at 25-30% of the total intensity

	Nominal production rate [ions/s]	Required production rate [ions/s]	Missing factor
${}^6\text{He}$	$2 \times 10^{13}$	$2 \times 10^{13}$	1
${}^{18}\text{Ne}$	$8 \times 10^{11}$	$1.9 \times 10^{13}$	24

- RF manipulations in transfers


- ion source → RCS → PS → SPS → decay ring

- process is not 100% efficient


- beam losses represent vacuum challenge in PS

- optimized lattice with collimation system could improve vacuum x100

## Predicted ${}^6\text{Li}$ losses in PS lattice

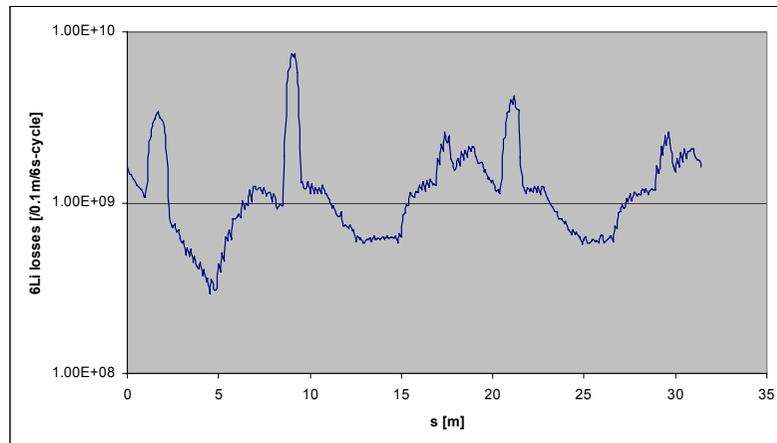

## Pressure degrades to 75 ntorr from ${}^6\text{He}$ losses

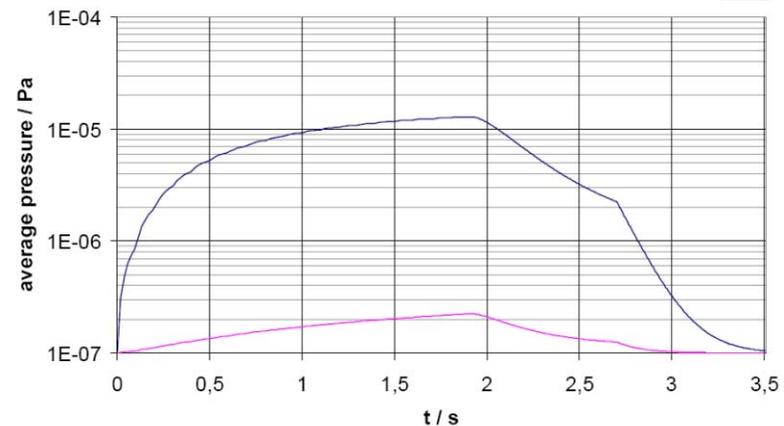


## • RF stacking in decay ring

- need to stack beam in decay ring to get acceptable decay rate
  - after 15-20 merges, about 50% of the beam is pushed outside the acceptance
- need substantial momentum collimation scheme
  - beam losses represent 150 kW average power load on collimators
    - peak load during bunch compression process (few 100 ms) will be at MW level

## Decay losses also an issue:

SC dipoles require 16 cm aperture and suffer  $\approx 10$  W/m heat load

## Predicted ${}^6\text{He}$ losses in decay ring

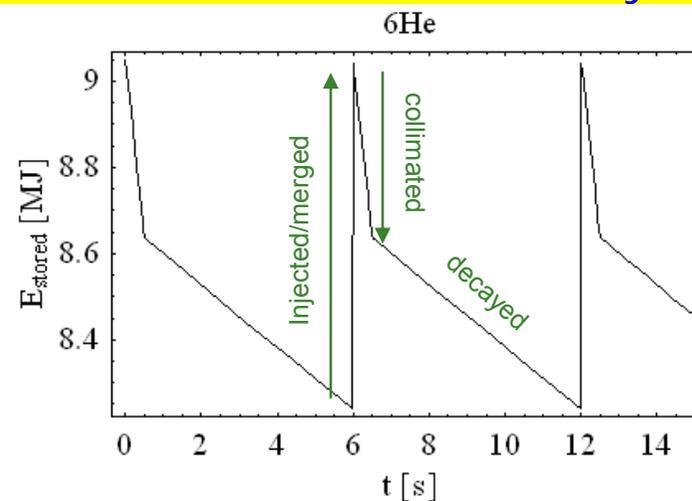





# NF R&D



- R&D program has three main thrusts
  - simulation and theory (ongoing effort as part of ISS)
  - development of high-power target technology
  - development of cooling channel and rapid acceleration technology
- Recent simulation effort has focused on simplifying NF design to reduce costs
  - replaced induction linacs with RF bunching and phase rotation scheme
    - this permitted simultaneous use of muons of both signs
  - improved acceleration system (RLAs → non-scaling FFAGs)
    - larger acceptance  $15\pi$  mm-rad →  $30\pi$  mm-rad
  - increased downstream acceptance permitted simplified cooling channel
    - fewer solenoids, fewer RF cavities, simpler absorbers ( $\text{LH}_2$  → LiH)
- Together, improvements doubled intensity (2 signs) and reduced cost of facility by 35%


# NF Target R&D (1)

- Disruption at moderate intensity (4 Tp) demonstrated in BNL E951
  - no solenoidal field
- What happens at higher intensity and with strong solenoid? (**MERIT**)

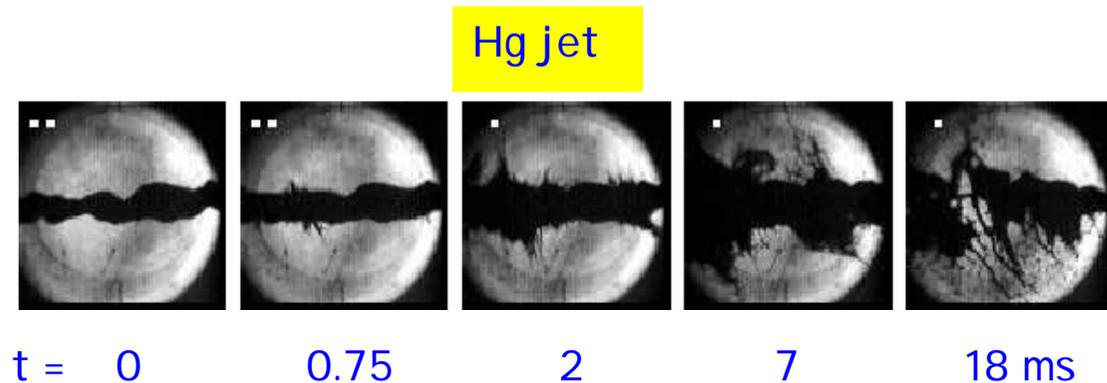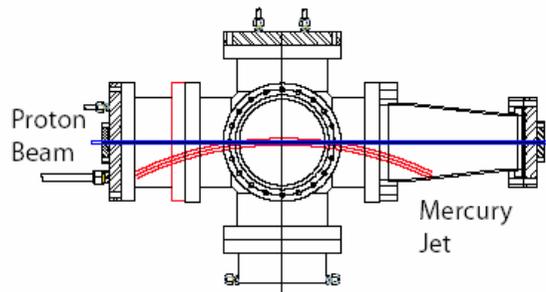

# NF RF R&D (1)



- Testing pressurized version of button cavity
  - use high-pressure H<sub>2</sub> gas to limit breakdown

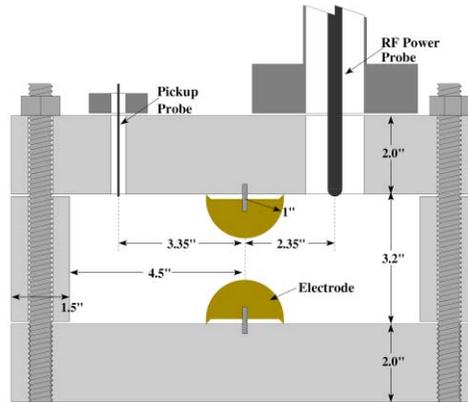



*Muons, Inc.*

Breakdown limitation does not degrade in magnetic field

Breakdown Voltage vs. Pressure  
(Air - 0.1 inch Gap)

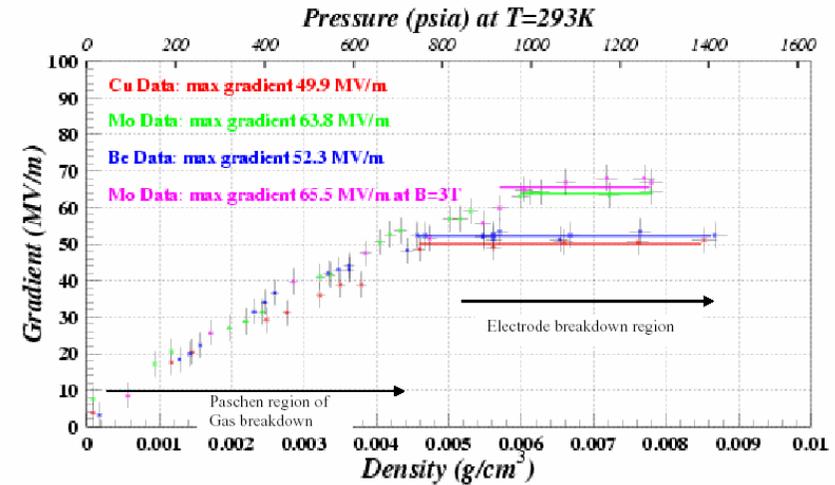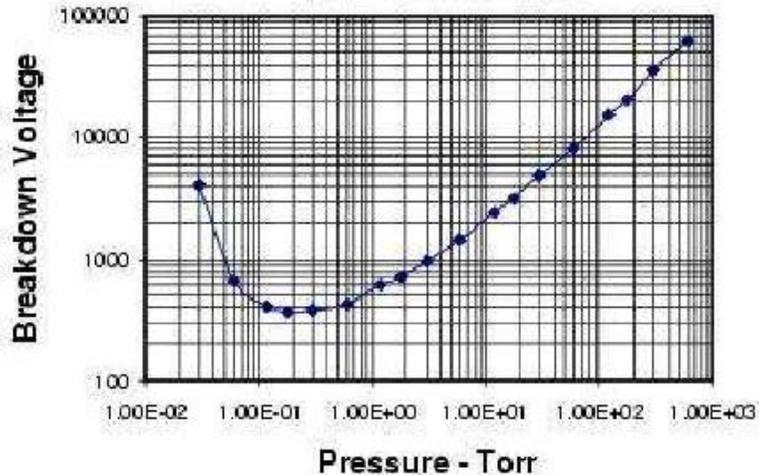


- Initial tests of 201 MHz prototype cavity are under way
  - fabricated by collaboration of LBNL, Jlab, and U-Mississippi
  - processed as if a superconducting cavity (electropolished)
- Cavity reached design gradient of 16 MV/m rapidly
  - no signs of conditioning up to 4.2 MW input power

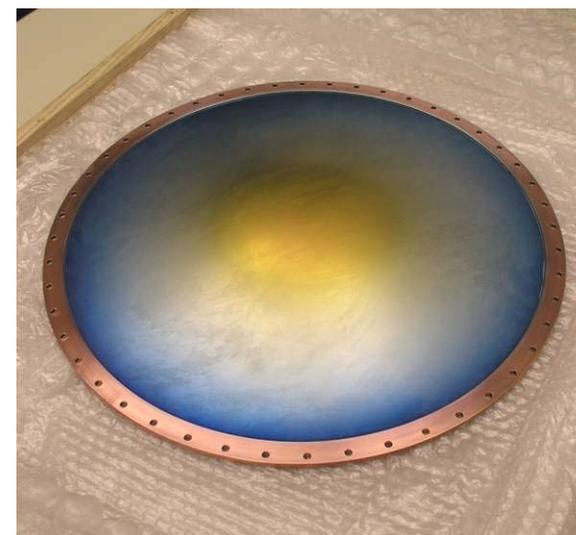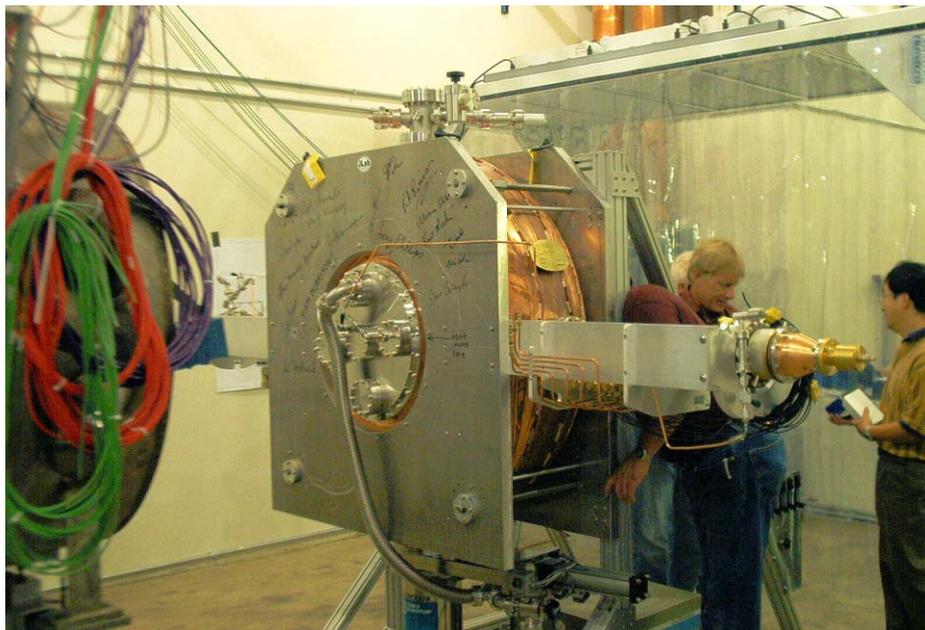

42-cm curved Be window



# NF FFAG R&D

- NuFact-J group has now built and commissioned world's first 150 MeV proton FFAG ring
  - experimental results in good agreement with design predictions
    - fast cycling (100 Hz) demonstrated

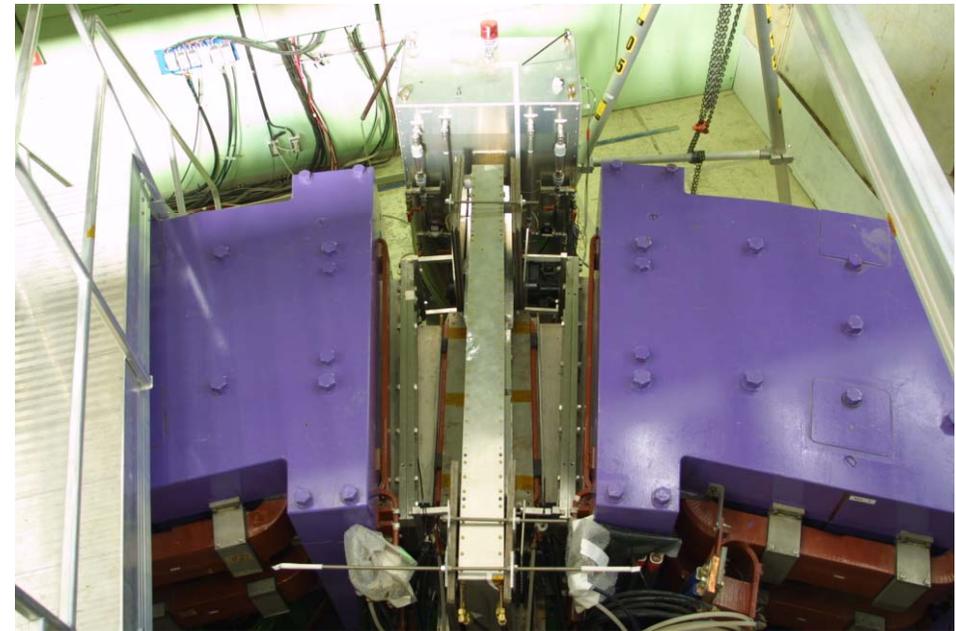


RF cavity

- Beta Beam work to date mostly “paper studies”
  - funded for system design, not hardware development
- New concept for production proposed by C. Rubbia *et al.*
  - based on ionization “cooling” of ions to maintain equilibrium emittance

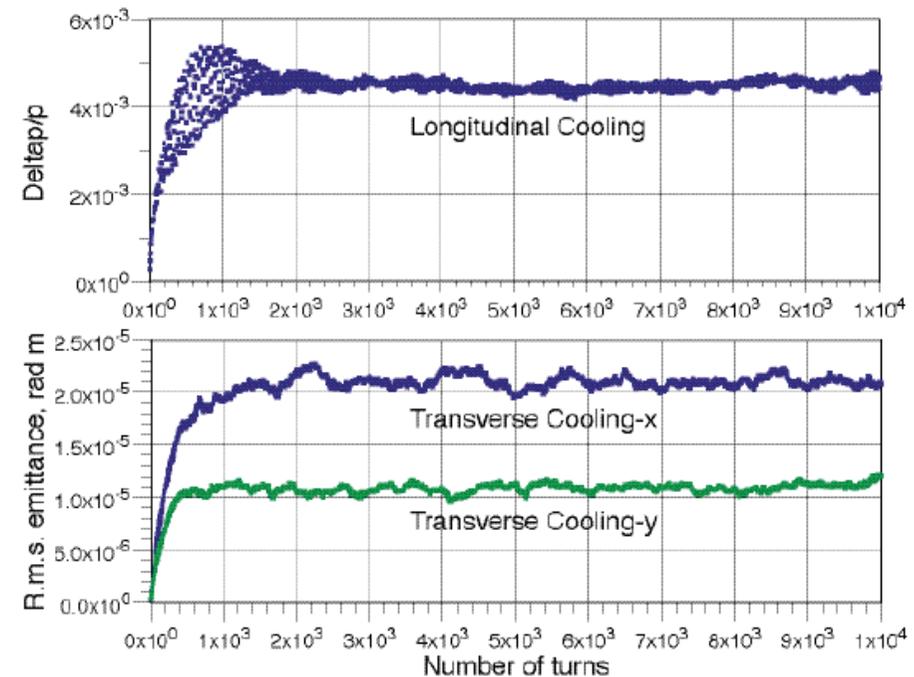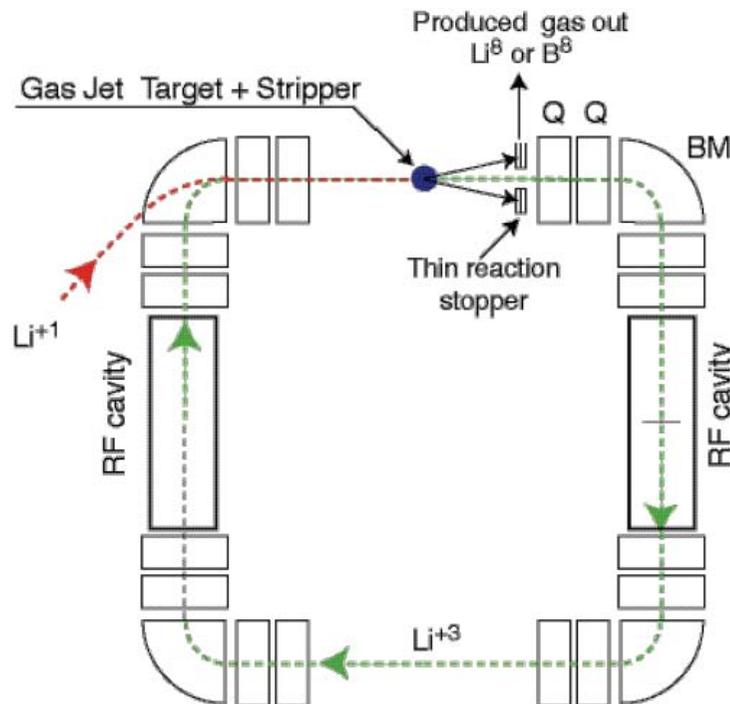


- Experimentally demonstrated key bunch merging technique in PS

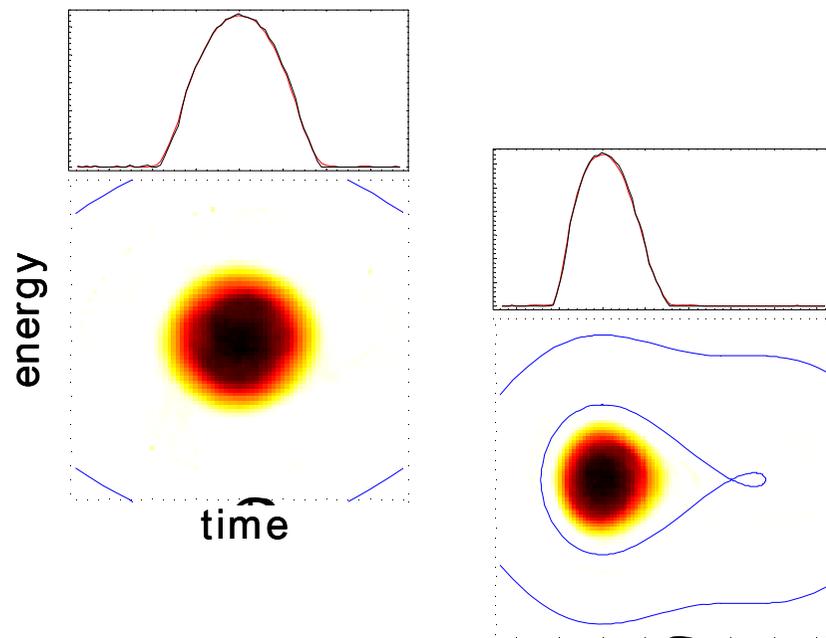

## Ingredients

- $h=8$  and  $h=16$  systems of PS.
- Phase and voltage variations.

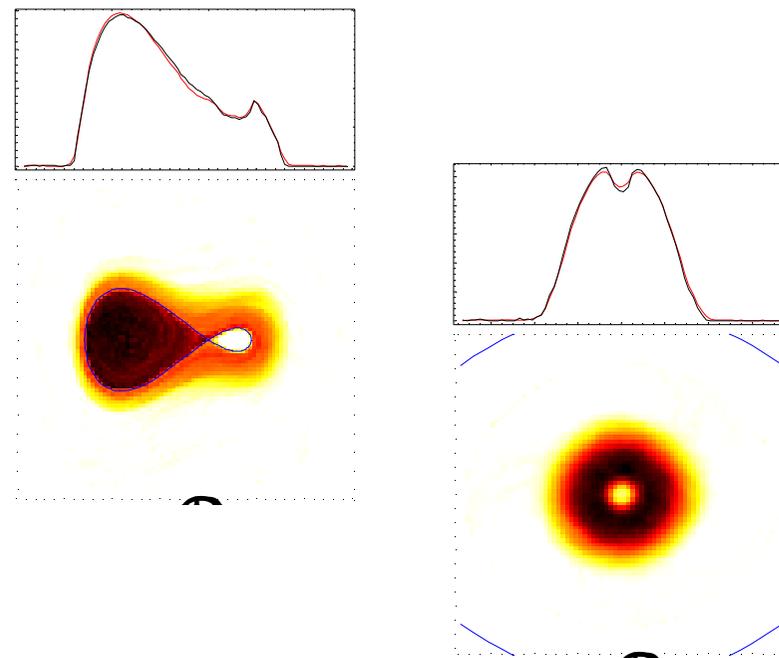

S. Hancock, M. Benedikt and J-L. Vallet,  
*A proof of principle of asymmetric bunch  
pair merging*, AB-Note-2003-080 MD


# System Tests-MICE (1)



## Muon Ionization Cooling Experiment


FIRST BEAM IN OCTOBER 2007

Demonstrate feasibility and performance of a section of cooling channel by 2010

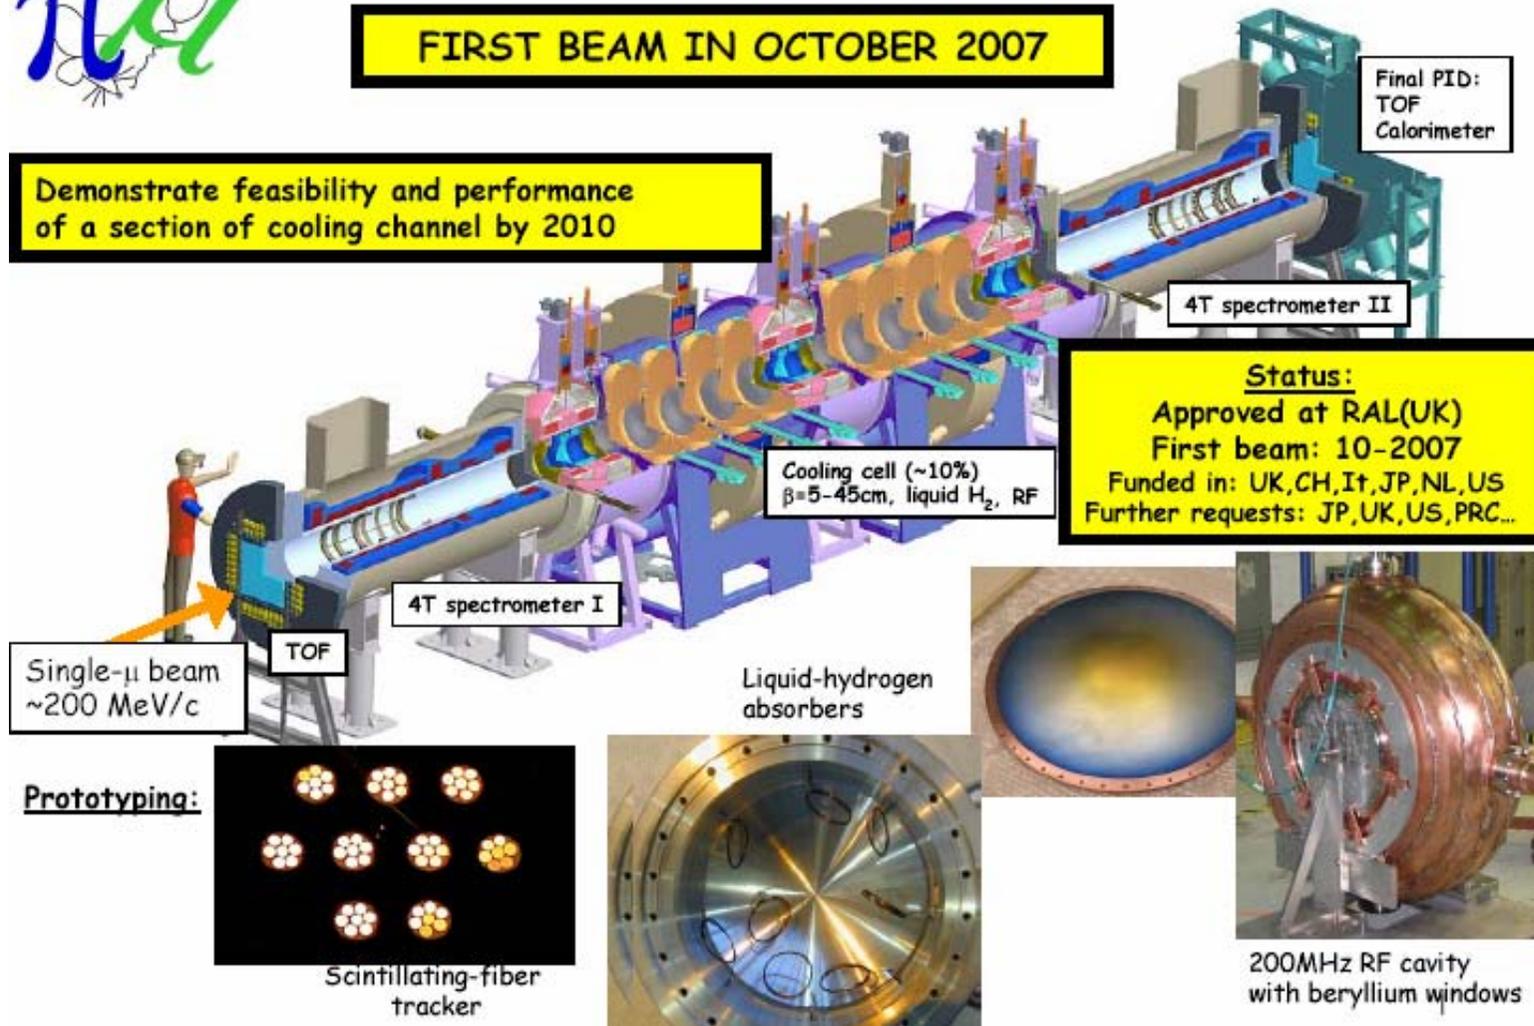



# System Tests-MICE (2)

- MICE channel at RAL will be built in steps to ensure complete understanding and control of systematic errors

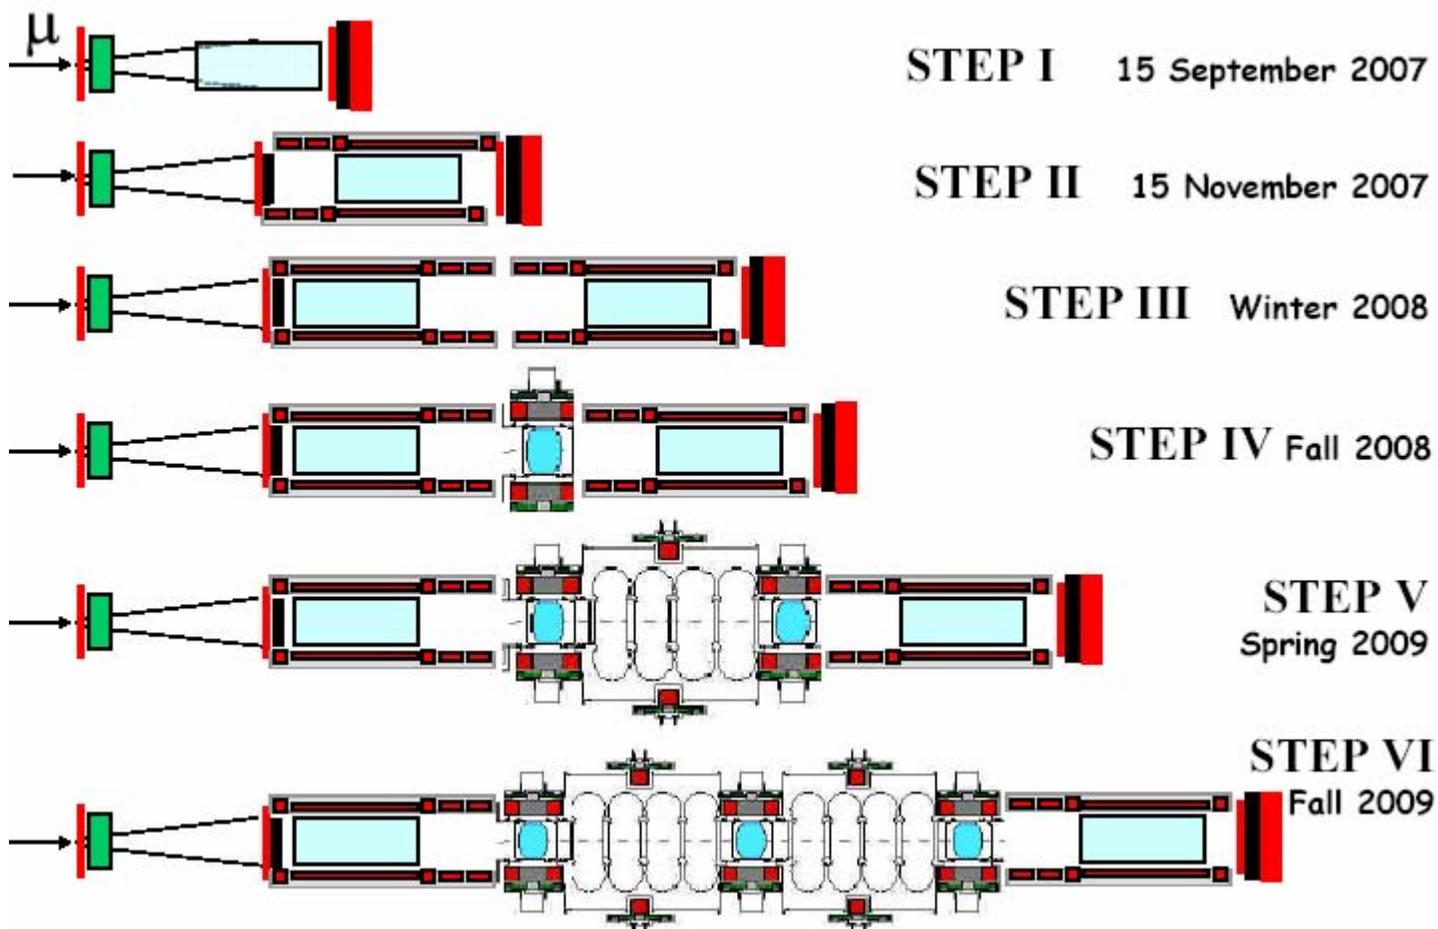

# System Tests-MERIT

- **MERIT experiment will test Hg jet in 15-T solenoid**
  - 24 GeV proton beam from CERN PS
  - **scheduled Spring 2007**

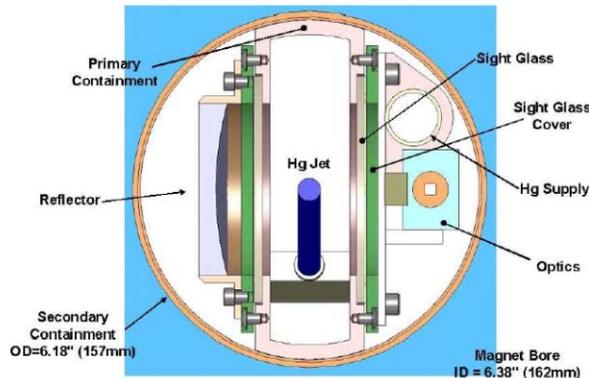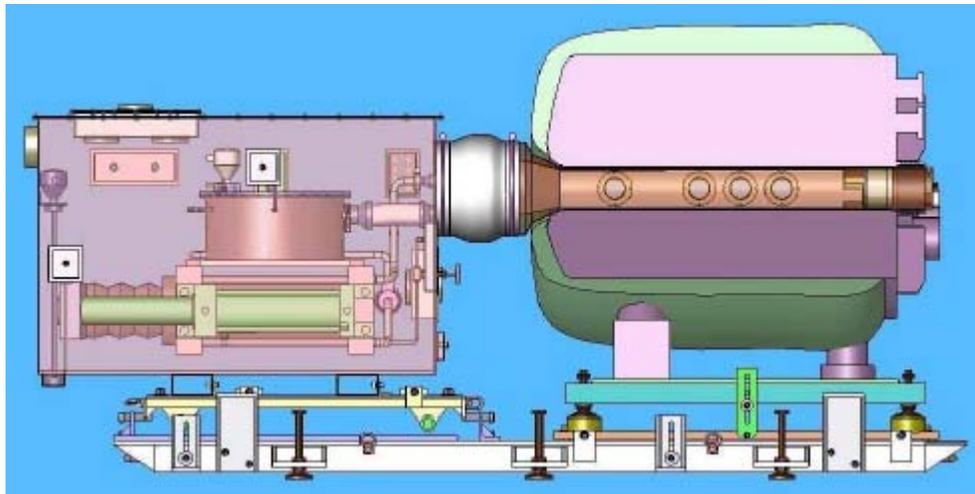

15-T solenoid during tests at MIT

Hg delivery and containment system under construction at ORNL



# Summary


---



- Substantial progress being made toward design of **accelerator-based neutrino facilities** to study CP violation in the lepton sector
- Work extending state-of-the-art in accelerator science
  - high-power targets, new cooling techniques, ion source development, rapid acceleration techniques, ...
- Work shown here represents efforts in EU, Japan, U.S.
  - carried out in coordinated fashion internationally
    - by choice, not dictated externally
- Thanks to **Mats Lindroos** and **Andreas Jansson** for sharing their expertise on Beta Beams

Paper studies alone  
are *not enough*

We need to build and  
test things!

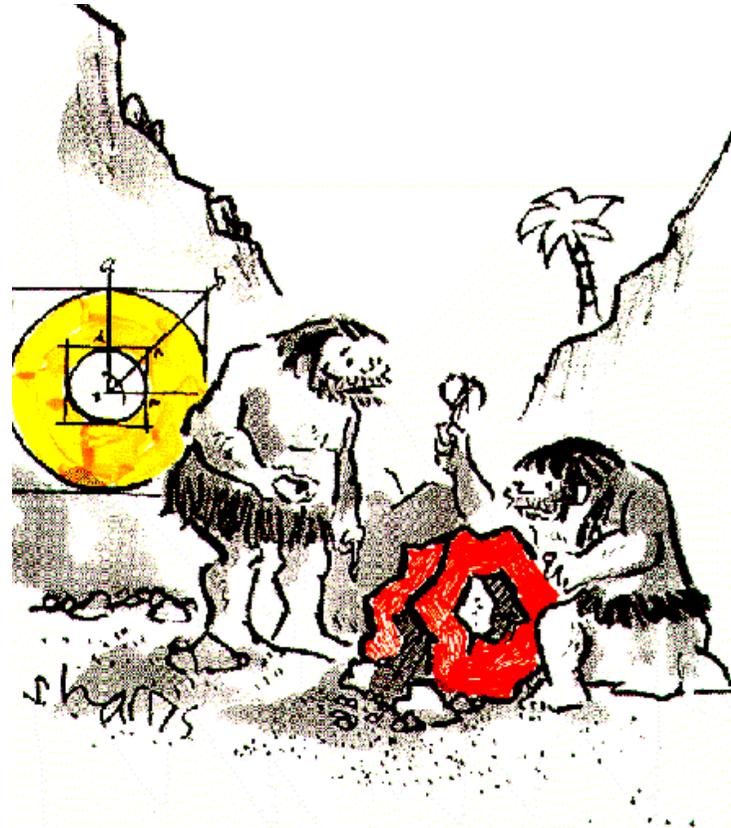

*"I guess there'll always be a gap between  
science and technology."*