

The TESLA Project

Björn H. Wiik

Deutsches Elektronen-Synchrotron and
University of Hamburg (II. Institute of Physics)

1. Introduction

During the past four years an international collaboration centered at DESY has worked on the layout of TESLA¹⁾, an e^+e^- collider based on low frequency superconducting rf cavities. The TESLA collaboration has also carried out a large R&D programme aimed at improving the performance and reducing the cost of superconducting rf cavities.

The TESLA e^+e^- collider facility will also be a source of coherent X-rays with tunable wavelengths in the Ångström region. Combined with the HERA electron ring it can furthermore provide an intense, high duty cycle polarized electron beam at energies up to 25 GeV.

In this lecture I'll first discuss the layout and the performance of the TESLA facility and then review the status of the R&D programme, and end with a few remarks on the realization of the facility. The focus will be on TESLA as an e^+e^- collider.

2. The TESLA Facility

A schematic layout of the TESLA facility is shown in Fig. 1.

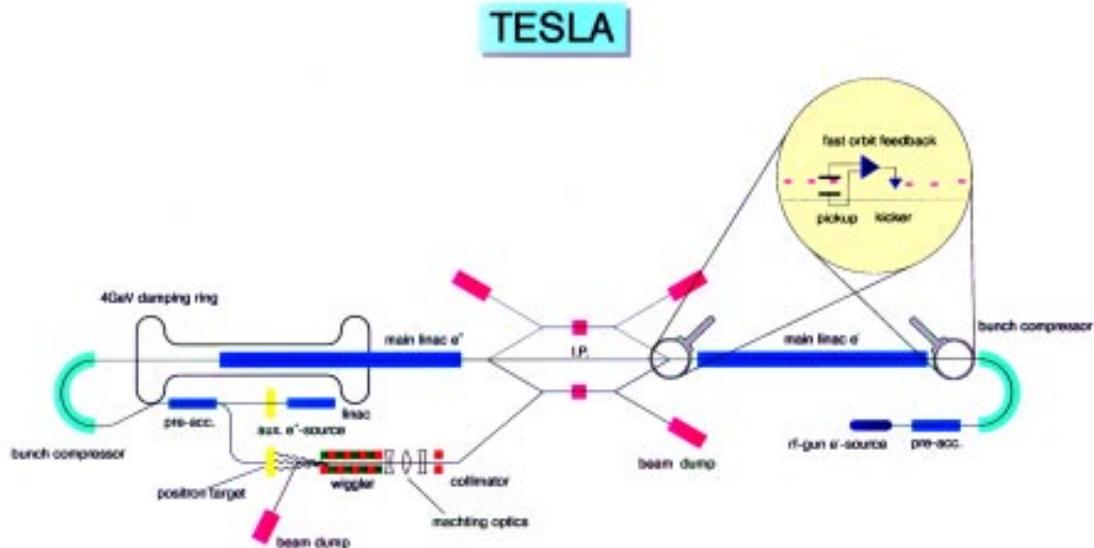


Fig. 1 Schematic layout of the TESLA Facility. In this drawing the electron damping ring has been replaced by an rf photoinjector as required for the X-ray laser.

A train of low emittance electron or positron bunches is extracted from a source system, compressed longitudinally, and injected into two opposing linear accelerators. The bunches are carefully aligned along the machine axis as defined by the quadrupole magnets and the rf cavities and accelerated to 250 GeV. After acceleration the beam halo is removed by a set of precision collimators, and the bunches are transported and focussed down to a few hundred nm in the horizontal direction and at the order of ten nm in the vertical plane and collided head on. The large bunch spacing makes it possible to use a bunch-to-bunch feedback system to ensure that opposing bunches collide head-on at the interaction point (I.P.). The spent beams are extracted from the interaction point and used to produce the next batch of positrons and electrons.

Interleaved with the bunches for particle physics, bunches of electrons originating from a low emittance rf photocathode gun are longitudinally compressed and accelerated to energies between 10 GeV and 50 GeV. They are then extracted from the linac, transported to the surface and passed through long, high precision undulators. The low emittance electron bunches traversing the undulators will yield a very bright, very short burst of transversely coherent

light with tunable wavelengths in the Ångström region. A total of 11315 bunches spaced by 93 ns are accelerated during each rf pulse. Using a transverse mode cavity to deflect the beam it is possible to feed several undulators during the same rf pulse. The electron beam energy may also be varied from bunch train to bunch train and consequently such a facility can serve a large number of users without interfering with the particle physics programme.

To realize an X-ray laser facility in the Ångström region requires multi-GeV electron beams of unprecedented quality. Furthermore, a large and well trained staff is needed to construct, commission and operate the facility and a large site is required to produce, handle and use the intense photon beams. Thus combining the laser facility with the e^+e^- collider facility will lead to a substantial reduction both in construction and operation cost.

TESLA, combined with the HERA electron ring, can also be used to produce a high intensity, high duty cycle electron beam in the energy range from 15 GeV to 25 GeV. In this scheme^{1,2)} additional electron bunches are accelerated in the first part of the TESLA positron linac and injected into the HERA electron ring at the chosen energy. The electrons are extracted over ms yielding a 30mA electron beam with a duty cycle of 85% and an energy resolution of order 10^{-3} . An additional advantage of HERA is that electrons may be polarized.

The combined duty cycle is of order 3 %. The facility can thus serve all users without interference provided that the rf system and the cryogenic system feeding the first part of the linear accelerator is upgraded compared to what is needed for the e^+e^- collider alone.

To study ep collisions in the multi TeV range electrons from a high energy, high duty cycle linear accelerator must be collided with the protons in a storage ring. Since TESLA will be using standing wave cavities, electrons and positrons can be accelerated in the opposite directions in the same linac and thus electrons accelerated in the first part of the positron linac can be made to collide with the protons in HERA yielding a cm energy of roughly 1.3 TeV. This ep-option³⁾ will not be discussed further.

3. Why superconducting cavities

The advantages of basing the main linac on superconducting low frequency cavities follow directly from the luminosity formula:

$$L = 5.82 \cdot 10^{20} \cdot \frac{\eta \cdot P_w}{E_{cm}} \cdot \left(\frac{\delta_E}{\xi_y \varepsilon_y^N} \right)^{1/2} \cdot H_D \left[\text{cm}^{-2} \text{s}^{-1} \right]$$

In this formula the e^+e^- cm energy is denoted by E_{cm} , P_w is the mains supply power and η is the overall efficiency for converting mains supply power into beam power, ε_y^N is the normalized vertical beam emittance at the source and ξ_y is the emittance dilution between source and interaction point, and d_E is the fractional energy loss due to beamstrahlung. H_D , the disruption enhancement factor caused by the pinch effect at collision is of order 1.5 to 2. This luminosity formula is based on the natural assumption that the vertical betafunctor at the interaction point is equal to the bunch length, i.e.. $\beta_y^* = \sigma_z$.

In the expression for the luminosity the cm energy E_{cm} and the fractional energy loss are both determined by the needs of the experiment. Thus for a given mains supply power P_w the luminosity formula contains only two free parameters: η and $\xi_y \cdot \varepsilon_y^N$, the normalized vertical beam emittance at the interaction point. Both parameters favour the use of low frequency, high Q-value superconducting cavities.

The Q-value of a superconducting rf cavity is roughly 10^6 times larger than the Q-value of a normal conducting cavity yielding a corresponding reduction in rf wall losses. A high accelerating gradient in a superconducting cavity can thus be established and maintained at low rf input power resulting in a large value of η . Furthermore, the high Q-value makes it possible to choose a low rf frequency and a large bunch spacing which minimizes wakefield effects.

The advantage of a low frequency superconducting accelerator can be demonstrated⁴⁾ by comparing the alignment tolerances of TESLA with those of an X-band accelerator.

When the beam traverses the accelerating structure it will induce longitudinal and transverse wakefields which act back on the bunch itself or on trailing bunches. The strength of the transverse and the longitudinal wakefield

scales proportional to the cube respectively the square of the rf frequency, hence the magnitude of the unavoidable emittance dilution between damping ring and interaction point depends strongly on the choice of the rf frequency.

The single bunch transverse emittance dilution caused by the short range wakefield can be written as:

$$\frac{\Delta\varepsilon}{\varepsilon} = F \cdot \bar{\beta} \cdot dy_c^2$$

where $\bar{\beta}$ denotes the average b-function in the linac, dy_c^2 is the rms offset of the cavities with respect to the axis and F is the dilution factor. The value of F as evaluated⁵⁾ for the various proposed linear colliders TESLA (1.3 GHz), SLC (3.0 GHz), SBLC (3.0 GHz), NLC (11.4 GHz), JLC (11.4 GHz), VLEPP (14.6 GHz) and CLIC (30.0 GHz) are shown in Fig. 2.

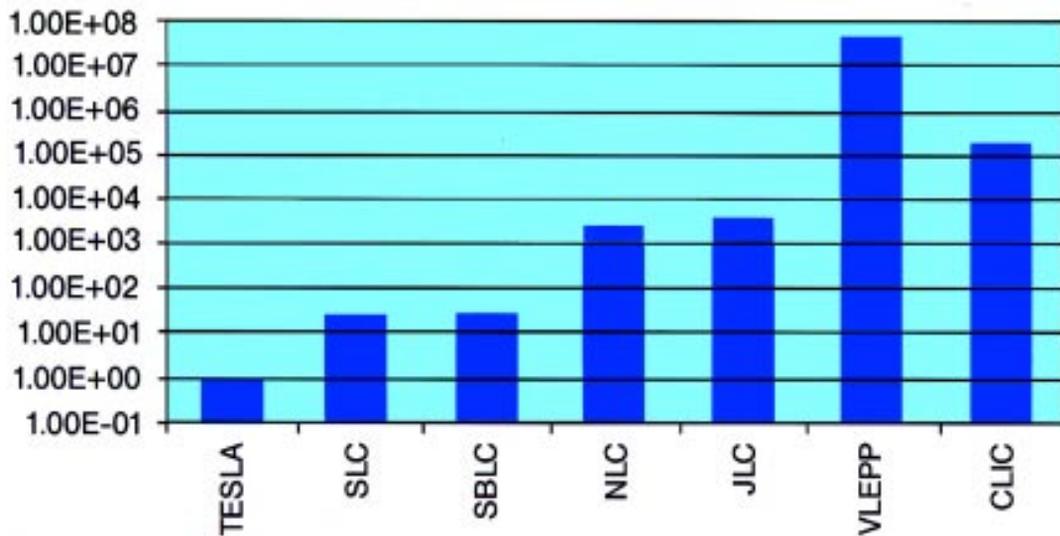


Fig. 2 The single bunch wakefield strength function F evaluated for different linear collider designs.

The required rms alignment tolerances are 500 mm for TESLA and of order 10 mm for the X-band. In the case of the X-band design this requires strong focussing and BNS⁶⁾ damping.

The effects of long range wakefields can be neglected in the case of TESLA. In the case of the higher frequency designs they can be controlled by the use of damped and detuned structures.

The strong focussing and the correlated momentum spread along the bunch required by the X-band design leads to strong dispersion and chromatic effects which dilute the emittance. This in turn leads to tight tolerances⁴⁾ on the order of 1 to 3 mm for the positioning accuracy of the quadrupoles and the beam position monitors in the case of the X-band compared to 100 mm for TESLA.

Clearly the base line TESLA design is rather conservative and it seems possible to increase⁷⁾ the luminosity by at least an order of magnitude as discussed below.

4. The TESLA Facility

4.1 The e⁺e⁻ collider

The schematic layout of the TESLA collider¹⁾ is shown above in Fig. 1 and its baseline parameters are listed in Table 1.

Table 1: Baseline TESLA Parameters

c.m. Energy (GeV)	500	800	1600
Total length (km)	33	33	62
Gradient (MV/m)	25	40	40
n _b per rf pulse	1130	2260	2260
Bunch spacing (ns)	708	283	283
Repetition rate (Hz)	5	3	3
N _e /bunch (10 ¹⁰)	3.63	1.82	1.82
ϵ_x / ϵ_y (10 ⁻⁶ m·rad)	14/0.25	12/0.025	12/0.025
β_x^* / β_y^* (mm)	25/0.7	25/0.5	25/0.5
σ_x^* / σ_y^* (nm)	845/19	618/4.0	436/2.8
s _z (mm)	0.7	0.5	0.5
d _E (%)	2.5	2.2	6.7
Number of klystrons	616	1232	2464
P _b (2 beams) (MW)	16.3	15.6	31.2
P _{AC} (2 linacs) (MW)	99	115	230
Luminosity (10 ³³ cm ⁻² s ⁻¹)	6	11	20

The basic building block of the linear accelerator is a 12.2 m long cryogenic module. The module consists of eight 1.035 m long nine-cell cavities installed

in a common cryostat. The module may also include a beam position monitor and steering and focussing magnets. The 1.3 GHz cavity made from high RRR Niobium sheets is mounted in a Helium container and is equipped with an rf power coupler, two higher order mode couplers and a mechanical tuning system driven by a step motor.

Each linear accelerator is made of 1232 cryogenic modules. Including the 2.2 km long beam delivery sections the total site length is of order 33 km.

Rf power to the cavities is provided by 616 klystrons, each of 10 MW peak power feeding 4x8 cavities. The nominal peak rf power is 216 kW/m leaving a 20% reserve to compensate for phase changes due to mechanical deformation of the cavities caused by the Lorentz force.

A total of 1130 bunches spaced by 708 ns are accelerated within the 1.33 ms long rf pulse and this is repeated at a rate of 5 Hz. The charge per bunch is $3.63 \cdot 10^{10}$ electrons (positrons) leading to $4 \cdot 10^{13}$ electrons (positrons) per rf pulse. It seems rather difficult to produce the required number of positrons for the bunch trains using a conventional source. It is thus proposed to pass the spent beams through a wiggler yielding a bright burst of high energy photons. After the beams depart from the wiggler, they are deflected into a beam dump, whereas the photon beam strikes a target producing a train of positron (electron) bunches which are preaccelerated by a conventional L-band linac followed by a superconducting linac to 200 MeV and 3.2 GeV, respectively.

The trains of positron (electron) bunches, spaced by roughly 65 ns are stored in two dog-bone-shaped damping rings with a circumference of roughly 17 km. Each damping ring consists of two 8 km long straight sections placed entirely in the linear accelerator tunnel connected with two loops at the ends. Damping times of some 20 ms are obtained using four 100 m long wigglers. Detailed calculations show that the required emittances can be achieved. Indeed, it seems feasible to produce beams with a vertical emittance more than an order of magnitude lower than presently required by either reducing the circumference of the ring or by raising its energy and by using beam based alignment techniques to center the beam.

The bunches are extracted from the damping ring, compressed longitudinally to 0.7 mm in a single stage, and injected into the main linac with the proper bunch spacing.

In order to reach a high luminosity the beam must be accelerated through the linear accelerator with a minimum of emittance dilution to the final energy

of 250 GeV. Several effects contribute to the emittance dilution, single and multibunch wakefield effects, dispersion effects due to the energy spread of the beam and vibrations.

Extensive tracking calculations were done assuming the components to be aligned to the following rms tolerances: Cavities 500 mm, quadrupoles and beam position monitors to 100 mm. The emittance growth is below 15% using a simple beam steering algorithm. With advanced beam based alignment methods this number can be reduced to a few percent.

Due to the large bunch spacing and to cavity-to-cavity detuning and higher order mode damping the limit for beam break up is quite high. For an rms multibunch energy spread of order $5 \cdot 10^{-4}$ the multibunch emittance growth is negligibly small.

An optimal trajectory through the linac is found through a beam based alignment. Effects due to the slow ground motion are cancelled out using a slow feedback system. The orbit must be corrected only once a day and every 2 years the optimal trajectory must be reestablished.

To correct for the fast motion one takes advantage of the fact that the bunches are spaced far apart. Beam monitors are measuring the position of the first few bunches and the centroid positions of the remaining bunches in the train are then centered using fast deflecting correctors as indicated in Fig. 1. This results in an acceptable quadrupole vibration tolerance of order 1 mm which is well above the measured amplitudes of order 0.1 to 0.2 mm.

After traversing the linear accelerator the beam is collimated, corrected and passed on to the final focussing system. In the final focus system the beam will be demagnified by a factor of 100. Demagnification factors of more than 300 have already been achieved at the final focus beam test facility⁸⁾ at SLAC.

For the X-ray laser a low emittance bunch train is produced in a special source system consisting of an rf photoinjector, a longitudinal bunch compression system and a 3 GeV linear accelerator. This system delivers a bunch train consisting of 11315 bunches spaced by 93 ns and each with a charge of 1nC. At the entrance to the main linac the rms bunchlength is 23 mm which corresponds to a peak current of 5 kA and the invariant transverse emittance is 1p mm mrad. Downstream along the linac two independent beams are extracted with energies tunable in the energy range between 10 and 25 GeV, respectively, between 25

and 50 GeV, transported over a distance of roughly 10 km and brought to the surface. At the surface the beam is distributed among three independent beam lines by means of a fast transverse mode cavity feeding a total of 4 SASE⁹⁾ undulators and 6 spontaneous undulator beam lines as shown in Fig. 3. Each photon beam line can feed 5 experimental stations - i.e. a total of 50 experiments can in principle be carried out simultaneously.

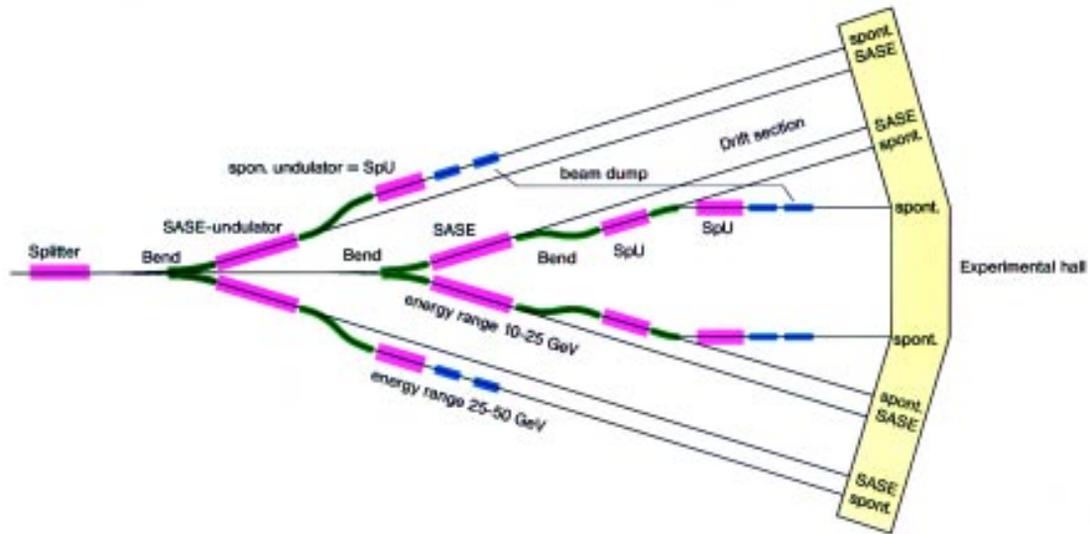


Fig. 3 A schematic layout of the photon beam lines as seen from above. Note that the two beam lines with electron energies between 10-25 GeV and 25-50 GeV are at different vertical heights.

By installing a small linac section in front of each section it is possible to fine tune the energy ($\pm 2\%$). It is also possible to vary intensity, polarization ect. within the bunch train. Typical photon beam parameters are listed in Table 2.

Table 2: Photon beam parameters

Typical undulator saturation length (m)	50-100 m
Peak spectral brilliance*	10^{34}
Average spectral brilliance*	10^{26}
Photon energy range (keV)	0.1-12 keV
Photon beam power (GW)	60-280
Number of Photons/bunch	10^{12} - 10^{14}
rms bunch width (fs)	200
Transverse coherence	1
Photon beam divergence	1 mrad
Photon beam size at exit chamber	20 mm

*The brilliance is quoted in number of photons[s·mrad²·mm²·(0.1% bandwidth)]

The temporal intensity of a single ESRF pulse is compared schematically in Fig. 4 with the intensity delivered by a single TESLA SASE pulse.

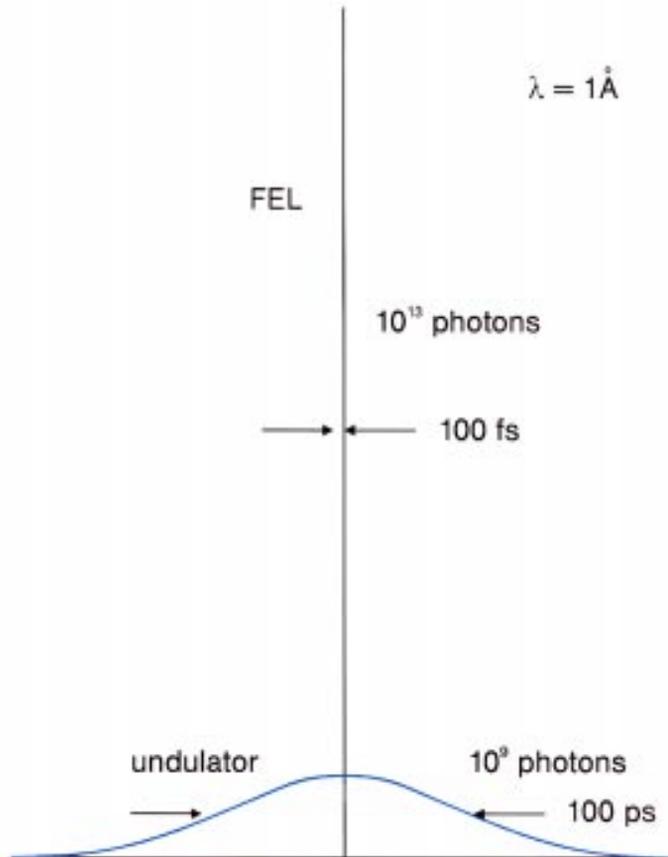


Fig. 4 Comparison between an ESRF undulator pulse and a TESLA SASE single pass pulse. In units of photons/s/mrad²/mm²/(0.1% bandwidth)

Peak and average brilliance for three single pass FEL's and for three possible undulators are plotted in Figs. 5a,b and compared to the performance of some third generation sources.

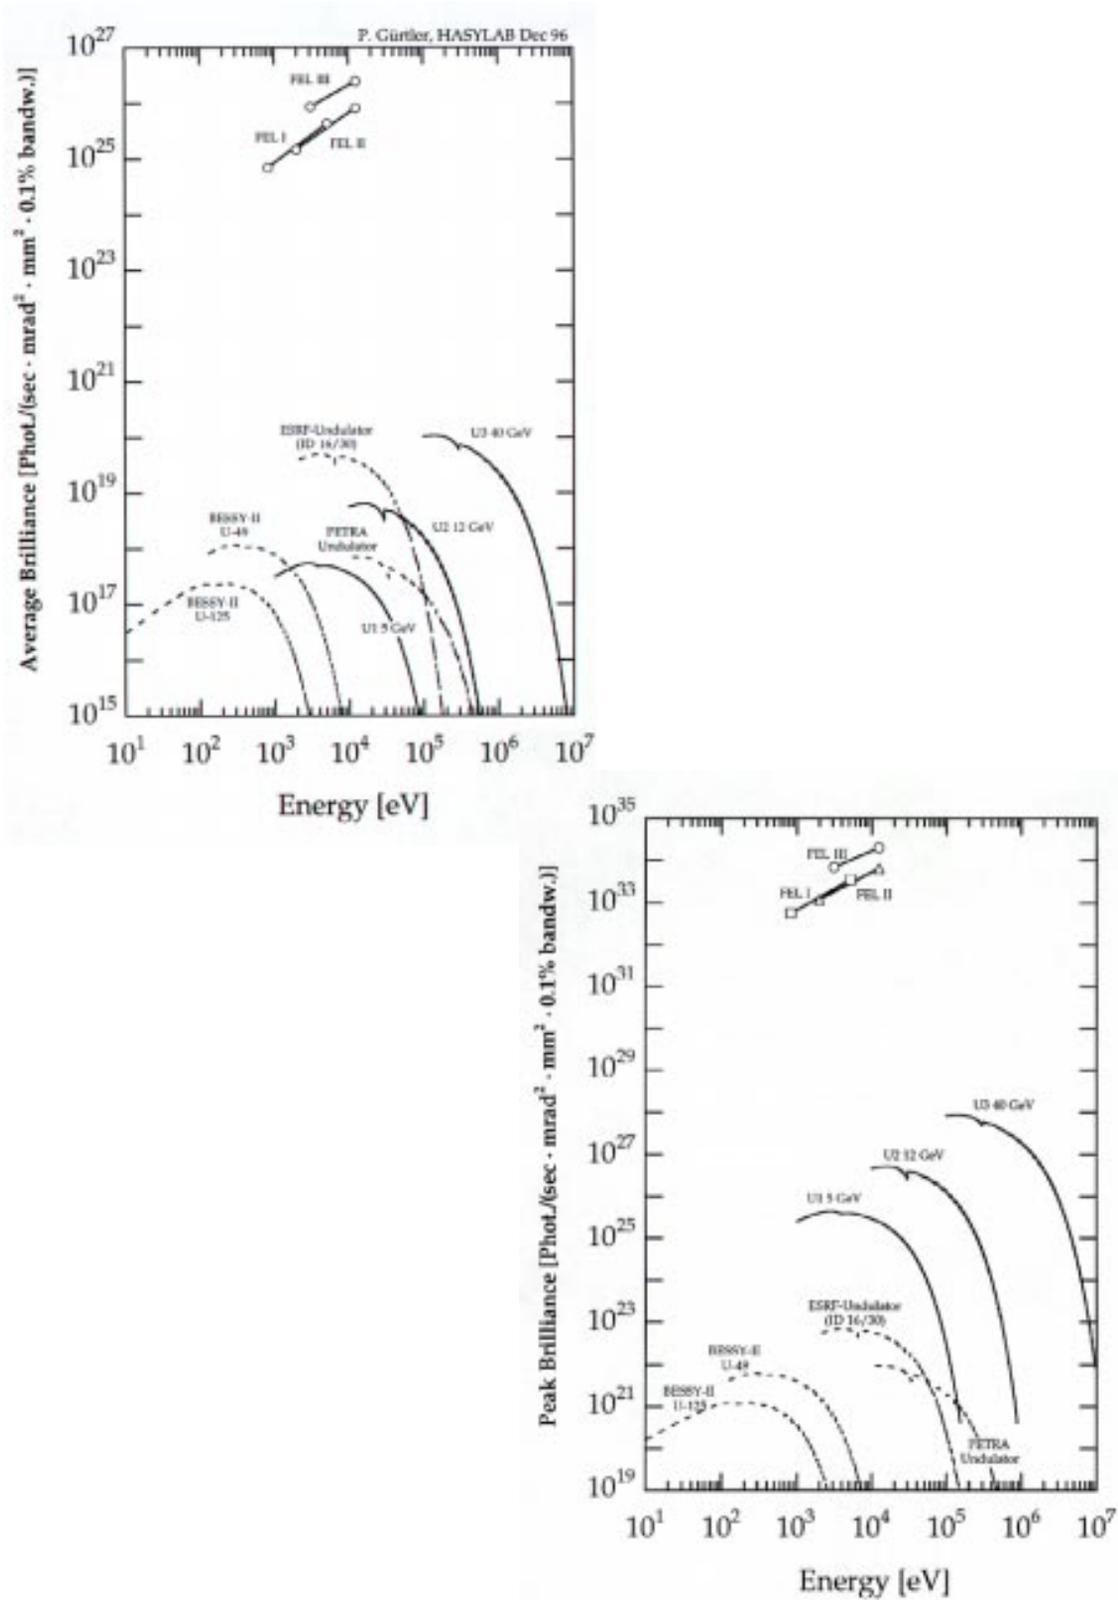


Fig. 5a,b Peak (average) brilliance plotted versus wavelength for the three FEL's proposed and for three possible undulators. For comparison the peak brilliance produced by conventional storage ring undulators are also shown.

4.2 Energy and Luminosity

The maximum voltage gradient of a superconducting cavity is around 55 MV/m, limited by the strength of the magnetic field at the equator of the cavity. This is well above the gradient of 25 MV/m assumed for TESLA 500. However, in the past accelerating gradients reached in multicell cavities have been limited to values around 5 to 10 MV/m by field emission from localized regions of the cavity surface, by thermal quenches induced by inclusions of foreign material in the Nb material or by the quality of cavity weld joints. The TESLA R&D programme has shown that gradients of 25 MV/m can be reached in solid Nb cavities based on present production techniques and on the quality of Nb sheets now available. Based on the steady progress in the performance of superconducting cavities it seems reasonable to assume that in the next decade cavities with accelerating gradients of order 40 MV/m will be at hand. Gradients close to 40 MV/m have already been reached¹⁰⁾ in single cell cavities.

Replacing 25 MV/m cavities with 40 MV/m cavities yields a cm energy of 800 GeV. A preliminary set of parameters for an 800 GeV e^+e^- collider are listed in Table 1.

Higher energies can also be reached by increasing the length of the accelerator. A very preliminary list of parameters for a 1.6 TeV collider some 64 km long can also be found in table 1. The proposed DESY site can accommodate a 75 km long linear accelerator.

It seems possible to increase¹¹⁾ the TESLA filling factor from its present value of 67% to a value of 80% by reducing the space between adjacent cavities in a module and by reducing the space allocated to cryogenic equipment. Keeping the length of the linac constant this would imply an increase in the cm energy from 500 GeV to 580 GeV, or from 800 GeV respectively 1600 GeV to 920 GeV and 1940 GeV. Conversely nominal energies may now be reached at a gradient of 20.6 MV/m respectively 33 MV/m.

It has also been recently proposed¹²⁾ to use the superconducting linear collider as a part of a muon collider. In this case multi TeV m^+m^- collisions seem feasible. However, numerous technical problems inherent to the construction of a muon collider are still unsolved. A fundamental problem is the intense neutrino flux resulting from the decay of the muons which represent a potential health hazard and may well limit the luminosity at high energies.

The physics potential of an e^+e^- collider depends strongly on the integrated luminosity. The quoted peak luminosity of $6 \cdot 10^{33} \text{cm}^{-2}\text{s}^{-1}$ corresponding to a yearly integrated luminosity of 50fb^{-1} , is based on conservative assumptions as discussed above. Because of the high efficiency for converting rf power into beam power and the low wakefields inherent to low frequency superconducting cavities, it seems feasible⁷⁾ to increase the luminosity of TESLA to values of order $5 \cdot 10^{34} \text{cm}^{-2}\text{s}^{-1}$ for a constant mains supply power of 100 MW and with $\delta_B \approx 3\%$.

The higher luminosity is reached by increasing the efficiency h by a factor of 1.5 to a value of 23 % and by lowering the beam emittance by a factor of 50. The former is the result of reducing the gradient to 20.6 MV/m while the decrease in beam emittance requires a redesign of the damping rings. The new, very preliminary parameters are listed in Table 3.

General parameters	ref. design	Stage I	Stage II	Stage III
# of bunches per pulse	1130	1410	2820	4028
Pulse length [μs]	800	950	950	950
Bunch spacing Δt_b [ns]	708	674	337	236
Bunch charge N [10^{10}]	3,63	4.0	2.0	1.4
Pulse current [mA]	8,2	9.5	9.5	9.5
Av. beam power [MW]	8,3	11.3	11.3	11.3
Emittance at IP $\epsilon_{x,y}$ [10^{-6}m]	14,0.25	14,0.25	10,0.3	8,0.0075
$\beta_{x,y}$ at IP [mm]	25,0.7	25,0.7	15,0.4	12,7,0.3
Spot size at IP $\sigma_{x,y}$ [nm]	845,19	845,19	558,5	459,2.1
Bunch length at IP σ_z [mm]	0.7	0,7	0.4	0.3
Beamstrahlung δ_B [%]	25	3.0	3.0	3.0
Vert. Disruption Dy	18	20	33	50
Luminosity [$10^{34} \text{cm}^{-2}\text{s}^{-1}$]	0.6	0.9	2.6	5.2

Table 3 Possible scenarios for the luminosity upgrade⁷⁾

5. Status of the R&D programme

5.1 The R&D Facility

The aim of the R&D programme¹³⁾ is to establish the technical base needed to construct and operate a high energy e^+e^- linear collider made of superconducting cavities and to demonstrate that this collider can be realized in a cost effective manner and that its performance meets the design goals. We also aim to demonstrate that the SASE principle can be used to produce coherent light with nm wavelengths.

The institutions participating in this programme are listed below in Table 4.

Table 4: Members of the TTF-Collaboration

China	IHEP Beijing, Tsinghua Universty Beijing
Finland	SEFT
France	CEA/DSM Saclay, IN2P3 Orsay
Germany	RWTH Aachen, MBI Berlin, DESY, GH Wuppertal, Univ. of Frankfurt, GKSS Geesthacht, FZ Karlsruhe, TH Darmstadt, TU Berlin, TU Dresden
Italy	INFN Frascati, INFN Milano, INFN Roma II
Poland	Acad. of Science Warsaw, Univ. of Warsaw, Univ. of Cracow, Univ. of Mining & Metallurgy Cracow, Atomic Energy Agency Warsaw, Soltan Institute Otwock-Swierk
Russia	JINR Dubna, IHEP Protvino, INP Novosibirsk
USA	Cornell University Ithaca NY, Fermilab Batavia IL, UCLA Los Angeles CA

5.2 Layout and performance of the cavities

A picture of a 9 cell resonator made from solid Nb sheets is shown in Fig 6 and the main cavity parameters are listed in Table 5.

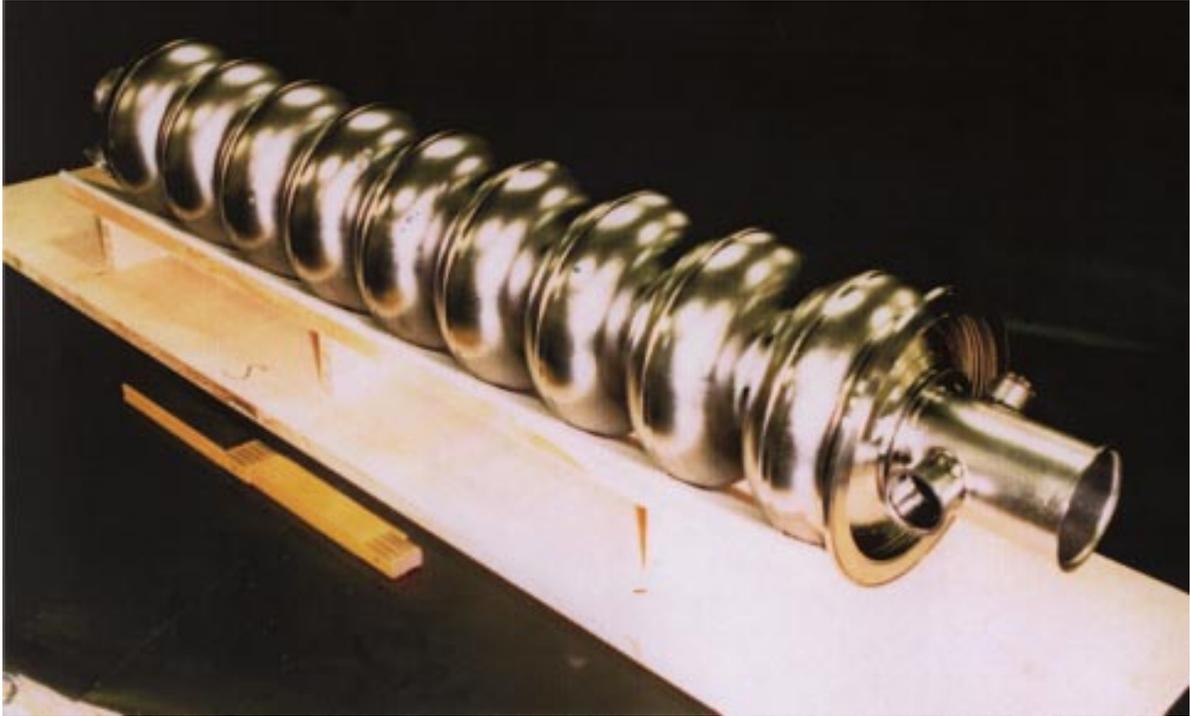


Fig. 6 Superconducting nine cell TESLA cavity made from solid Nb sheets

Table 5: Cavity Design Parameters

Frequency	1.3 GHz
Number of cells/cavity	9
Operating temperature	1.8 K
Q_0 at 15 MV/m	$\geq 3 \cdot 10^9$
R/Q	973 Ohm/m
Accelerating Field	> 15 MV/m
$E_{\text{peak}} / E_{\text{acc}}$	2.0
$B_{\text{peak}} / E_{\text{acc}}$	4.2 mT/MV/m
Cavity length	1.03 m

The complete cavities are produced by industry starting from high purity Niobium sheets 2.5 mm thick.

The raw Niobium material is purified using electron beam melting and the remaining contamination is of the order of a few ppm for O₂ and N₂ and roughly 100 ppm in the case of Ta. After the mechanical treatment, the damaged surface layer is removed by etching and the sheets are heat treated to reach the required residual resistivity ratio of 250 or more and to produce a uniform grain size.

So far, 24 cavities which have been produced by European firms, have been processed and tested at temperatures down to 1.8 K at the DESY facility. A detailed discussion can be found in contributions to this conference, here I summarize the main results only.

Some 40% of all cavities measured so far reach gradients in excess of 20 MV/m. For these cavities the Q-value versus the accelerating gradient are plotted in Fig. 7. The average gradient and average Q-value of 23 MV/m respectively $1.7 \cdot 10^{10}$ in the continuous wave mode exceed the design goal of 15 MV/m and $3 \cdot 10^9$ and are approaching the performance needed to construct TESLA.

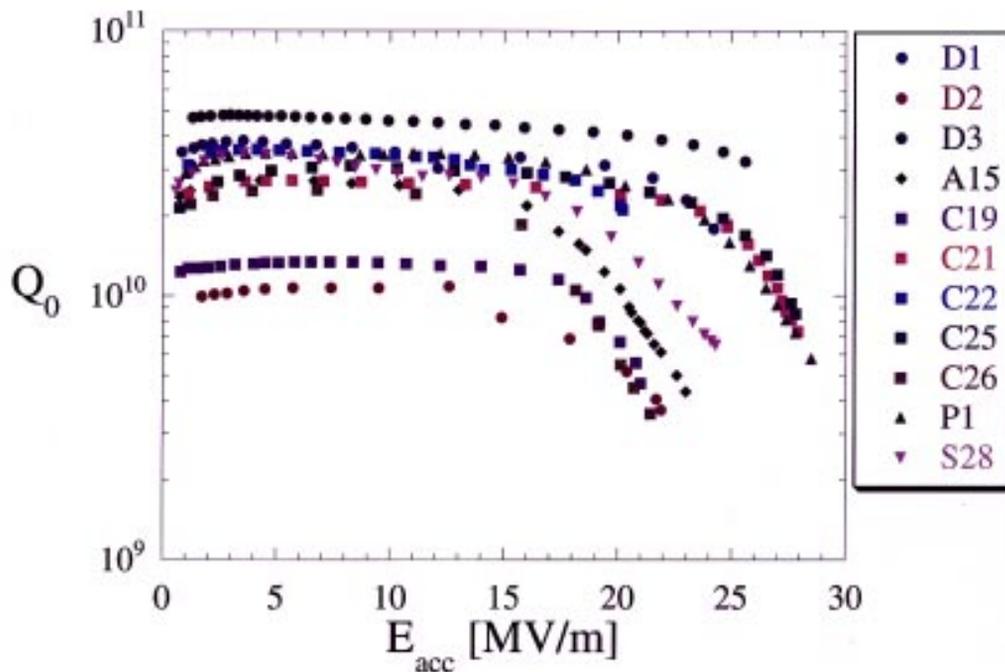


Fig. 7 Quality factor versus gradient for all cavities with a limiting gradient of 20 MV/m or more. Some 40% of the cavities tested meet this criterium. The performance of A15, C21, C25, C26, S28, P1 is limited by the amplifier.

The performance of the remaining cavities seems to be limited mainly by:

- problems occurring during manufacturing
- impurity inclusions in the material.

In Fig. 8 the observed Q-value is plotted versus the accelerating gradient for cavities marked S which were produced by a single vendor.

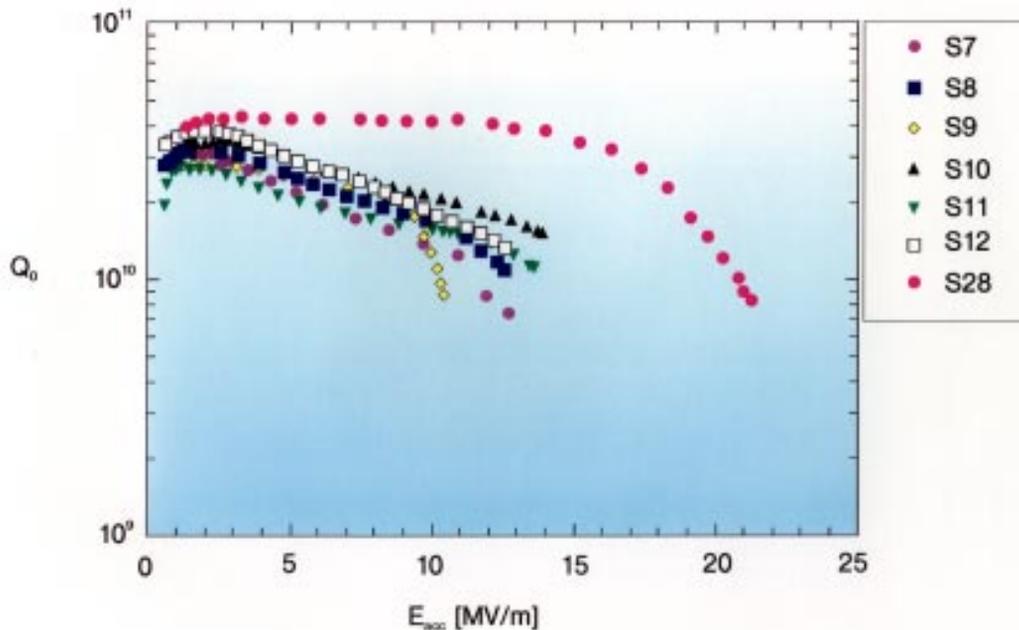


Fig. 8 Quality factor versus gradient for cavities produced by a single vendor. Cavity S28 was produced using an improved welding procedure.

The Q-value for six of these cavities decreases rapidly with increasing gradient leading to a quench at gradients between 10 MV/m and 15 MV/m. It was demonstrated by temperature mapping that the quenches occur at the weld joints and it was found that they were caused by an inadequate welding procedure. The performance of S28 which is the first cavity produced by the same vendor using an improved welding procedure is also plotted in Fig. 8. Note the strikingly different Q-behavior of this cavity as a function of gradient. The maximum observed gradient of 24.5 MV/m is limited by the available rf input power.

The performance of the remaining cavities is in general limited by a quench in a single cell. The location of the quench was determined by temperature mapping and it was found that it was in general caused by impurity inclusions in the material. Only 6 cells out of the 54 cells in the 6 D cavities listed above fail to reach a gradient of 20 MV/m. Thus 6 out of the 108 Nb sheets used in the production of the D cavities had presumably inclusions which limited the cavity performance.

The 26 cavities now under production will all be fabricated using pretested Nb sheets and improved quality control.

5.3 The TESLA test accelerator

The layout of the TESLA test accelerator¹³⁾ is shown in Fig 9 and its parameters are listed in table 6.

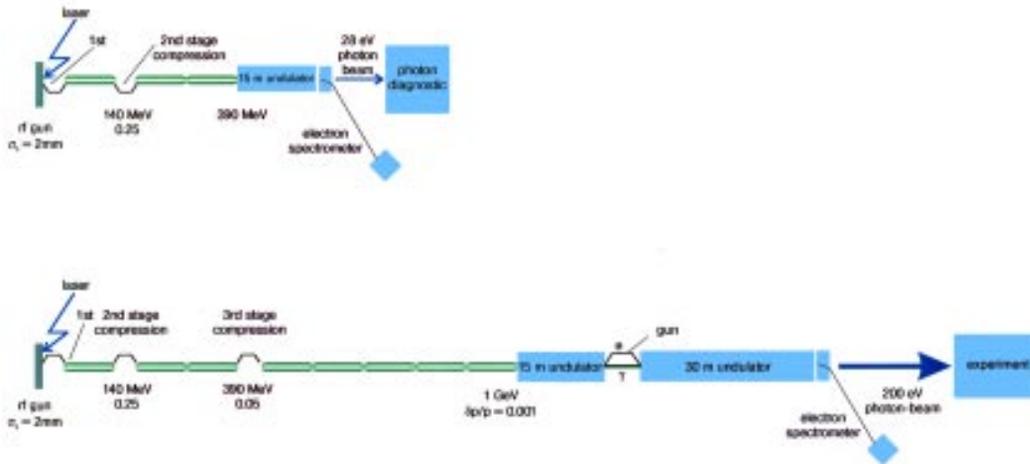


Fig. 9 The layout of the TESLA test accelerator. In a second stage the linac energy will be extended to at least 1 GeV.

Injector I, made of a thermionic gun providing a 250 keV 8mA continuous beam, a 217 MHz buncher cavity and a 9-cell standard TESLA superconducting cavity as a capture cavity, has been installed and commissioned.

Recently the first cryomodule containing 8 cavities was installed and cooled down to 1.8 K. The static heat load at 1.8 K is of order 0.5 Watt/m.

Unfortunately one of the stepping motors used to tune the cavities at cryogenic temperature was blocked during the first series of experiments. The remaining 7 cavities have been tuned and powered in parallel by a common rf source.

A beam with the design current of 8 mA was accelerated to an energy of 125 MeV corresponding to an average peak gradient of 16.7 MV/m. The observed quench limit corresponds to an average peak gradient of 19.4. MV/m. The flat top of the rf pulse was 100 ms long and the beam was accelerated and transported to the beam dump some 40 m downstream of the module exit with

100% transmission. The rms energy spread was $3 \cdot 10^{-3}$. So far no deleterious effects due to ground vibrations were observed. The performance of the first module thus meets or exceeds the design goals.

The remaining two modules will be installed in early autumn of 1998. By that time the rf photoinjector capable of providing a beam with the TESLA design parameters will become available.

This facility will then serve as an integrated system test and will also provide a wealth of data on the performance of individual subsystems. Besides operational issues the experiments will also address crucial beam dynamics issues.

With this facility it will also be possible to extend the measurements of the single pass SASE (Self Amplified Spontaneous Emission) process⁹⁾ down to wavelengths of order 40 nm.

For this purpose the facility will be augmented by the following components:

- A low emittance, high bunch rate rf photoinjector.
- Two stages of bunch compressors yielding a 0.4 mm long bunch at the entrance of the undulator.
- A 15 m long undulator with an undulator wavelength of 27.3 mm and a magnetic field strength of 0.497 T.
- Instrumentation.

The construction respectively the commissioning of these components is well advanced and the first SASE experiments are scheduled for the spring of 1999.

Table 6: TTF Linac Design Parameters.

Linac Energy (MeV)	390
RF frequency (GHz)	1.3
Accelerating gradient (MV/m)	15
Unloaded quality factor	$3 \cdot 10^9$
Number of Cryomodules	3
DE/E single bunch rms	10^{-3}
DE/E bunch to bunch rms	$2 \cdot 10^{-3}$
Bunch length	1 mm
Beam macropulse length	800 ms

After the completion of the test programme at TTF I it is planned to raise the energy to at least 1 GeV by installing additional modules. These modules will be installed in a 5.2m diameter tunnel as foreseen for TESLA. This linac serves a dual purpose:

- Provide an integrated system test of new and improved components and systems.
- Driver of a SASE FEL with wavelengths down to 6nm and below.

The second stage of the TTF will be based on the experience from TTF1 and incorporate novel features:

- The electron beam welding of the cups is a costly and delicate step in the cavity production process. Indeed, faulty welds seems to be the main reason why cavities do not reach fields above 20 MV/m. Two methods - hydroforming and spinning - are presently being explored. Palmieri and his coworkers at Legnaro have successfully produced¹⁴⁾ two single-cell cavities, one four-cell cavity and one five-cell cavity by spinning. The first one cell cavity has been tested and has reached a gradient of 24.5 MV/m at a Q-value of $3 \cdot 10^9$. This cavity was made of sheet Nb with a RRR of 300. A Nb cell has also been successfully produced by hydroforming. It is planned to equip a part of the modules with seamless cavities.
- It seems possible¹¹⁾ to feed three to four seven-cell cavities with a single power coupler. Tests of this concept are now underway and if successful a few of the modules will be based on this concept.
- The cavities will be excited by a high efficiency ($\geq 70\%$) multibeam klystron now under development in industry. The first test data are encouraging and we expect the first klystron of this type to be delivered in 1998.
- This klystron will be powered by a novel type of modulator with the energy stored in a superconducting solenoid. A first prototype modulator based on this principle is now being developed at Forschungszentrum Karlsruhe and should be available in 1999.
- Based on experience with the TESLA Test Facility several other components are being slightly modified. We thus expect that this second iteration will result in an accelerator which in layout and performance will be very close to the final TESLA design.

After a series of experiments which will provide information on TESLA in its collider mode, this linac will be used as a driver of a 30 m long undulator providing coherent light with the first harmonic at 6 nm. The schematic layout of the facility is shown above in Fig. 9.

The expected peak brilliance of this facility is plotted in Fig. 10 versus photon energy. Note that the brilliance can be raised by two orders of magnitude using a seed laser. As a seed laser we plan to pass the electron beam through a 15m long undulator and pass the light output directly to the main undulator while delaying the electron bunches by the appropriate amount. The high brilliance, coupled with the short pulse length and the 100% coherence will open up new experimental possibilities in many areas. After a running in period an extensive experimental programme is planned. Such a programme is mandatory in order to be able to utilize the TESLA X-ray facility.

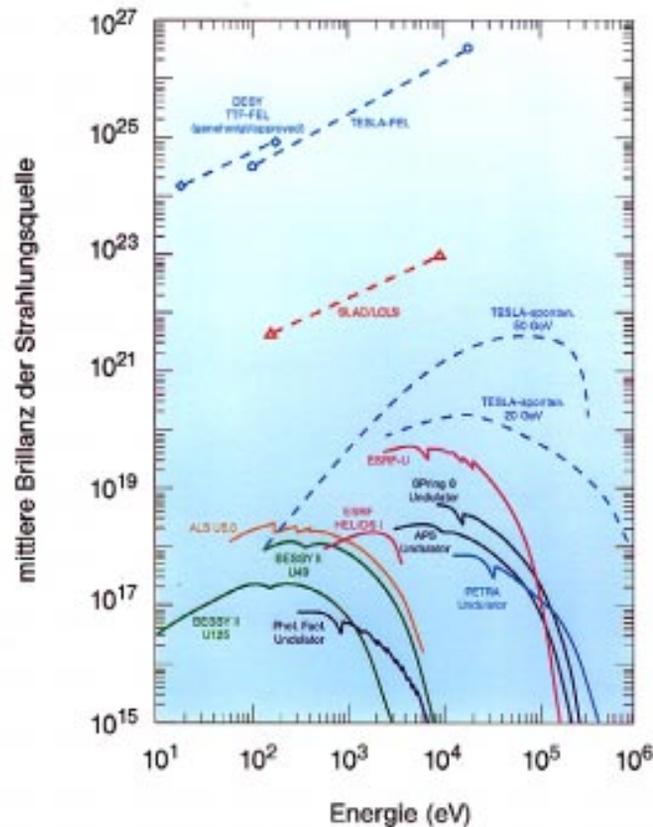


Fig. 10 Average brilliance of the TTF FEL in comparison with the performance of some third generation light sources. The average brilliance of the proposed SLAC FEL is also shown.

6. Outlook

A Conceptual Design Report covering the accelerator and its scientific potential is now available. Members from more than 50 Institutes in 12 countries have collaborated in writing this report.

This report will be the basis for a detailed engineering design of the TESLA facility and it also affords a detailed comparison with other approaches.

Two potential sites - one at FERMILAB and one at DESY - have been explored. Both sites are well suited from a geological point of view and have the additional advantage of offering a large well trained staff and substantial infrastructure which can be integrated into the project.

The layout of the accelerator at the DESY site is shown in Fig. 11. The 5.2 m diameter tunnel starts on the DESY site and runs Northern, along straight section West of HERA for a total length of 33 km. The collision hall and the facilities for the synchrotron radiation users are on a common campus situated 16.5 km to HERA hall West. A surface building every 6 km is needed to house the refrigeration plant and the modulators. The location of these buildings is also indicated.

For the main part the tunnel follows the earth's curvature at an average depth of 15 m. It passes through sand below the water table and will be built using the same tunnel boring technology as used for the construction of HERA.

A joint committee set up by the governments in Schleswig-Holstein and Hamburg has defined the legal framework for the construction of this facility. Work on an environmental impact report has started.

The final proposal including cost and time schedule will be based on the successful operation of the test facility and on industrial studies of the main components. We expect that this proposal will be completed by 2001. We have estimated that the facility as proposed can be constructed in 7 years.



Fig. 11 Potential site for the Linear Collider

References

1) Conceptual Design of a 500 GeV e^+e^- Linear Collider with integrated X-Ray Laser Facility

R. Brinkmann, G. Materlik, J. Rossbach and A. Wagner (Eds.)

DESY Report 1997-048; ECFA Report 1997-182 (This report also includes a complete set of references.)

Future Electron Accelerators and Free Elektron Lasers - Prospects and Opportunities in Natural Sciences

G. Ingelman and L. Jönsson (Eds.)

Nuclear Instruments and Methods RD 9, 348 (1997) 1-108

2) R. Brinkmann, DESY TESLA 95-14

3) M. Tigner, B.H. Wiik and F. Willeke

Proc. 1991 IEEE, Part. Acc. Conf., San Francisco May 1991,

Vol. 5 (1992) 2916

4) A. Mosnier, in press

Proc. XVIII International Symposium on Lepton-Photon Interactions, Hamburg 1997

5) R. Brinkmann, DESY Report M-95-10, 1995

6) V. E. Balakin, A. Novokhatsky and V. Smirnov

Proc. of the 12th Int. Conf. on High Energy Acc. (1983), 119.

7) R. Brinkmann, DESY TESLA 97-13

8) Final Focus Test Beam Design Report,

SLAC Report 376 (1990)

D. Burke, Proc. 4th European Part. Acc. Conf. London 1994, Vol I, 23

9) A. M. Kondratenko and E. E. Saldin

Part. Acc. 10 (1980) 207

R. Bonifacio, C. Pellegrini and L. M. Narducci,

Optics Communications 50 (1989) 373

- 10) P. Kneisel, R. W. Röth and H.-G. Kurschner,
7th Workshop on RF-Superconductivity, Saclay 1995, p. 449
M. Ono et al.
Proc. of the 21st. Linear Accelerator Meeting, NUP-A-96-16, 36
Tokyo, 1996

- 11) J. Sekutowicz, private communications

- 12) D. Neuffer, H. Edwards and D. Finley,
Proc. 1997 IEEE Part. Acc. Conf.
Vancouver 1997, in press

- 13) A Proposal to Construct and Test Prototype Superconducting R.F. Structures
for Linear Colliders
DESY Internal Report, April 1992
TESLA Test Facility Linac,
D. A. Edwards (Ed.) TESLA 95-01, 1995

- 14) See V. Palmieri, Contribution to this conference.