

## STUDY ON A 325MHz HOM DRIFT TUBE LINAC\*

L. Lu<sup>†</sup>, C. C. Xing<sup>1</sup>, T. He<sup>1</sup>, L. Yang<sup>1</sup>, X. B. Xu, L. B. Shi, L. P. Sun, J. Li<sup>1</sup>, Q. X. Xia<sup>1</sup>, Z. C. Gao  
 Institute of Modern Physics (IMP), CAS, 730000 Lanzhou, China  
<sup>1</sup> also at University of Chinese Academy of Sciences, 100049 Beijing, China

### Abstract

Normally, drift tube linacs (DTL) are used following RFQ linacs for beam acceleration in middle and high beam energy region. but acceleration efficiency of DTLs is decreasing with beam energy increasing. Using resonated higher order mode (HOM) of cavity, DTL can get higher effective shunt impedance. we proposed a 325MHz DTL with TE<sub>115</sub> mode. In this paper, the dynamics calculation and electromagnetic design of the HOM-DTL will be reported.

### INTRODUCTION

Shown in Fig. 1, in the low energy region, because the Interdigital-H (IH) type drift tube linacs (DTLs) have a higher shunt impedance and suitable accelerating structure for heavy ion acceleration, the DTLs operated in TE<sub>111</sub> mode are normal used following the RFQ type linac [1-3]. However, in the medium and high energy region, the Alvarez type DTLs operated in TM<sub>010</sub> mode are normally used although its shunt impedance reduces rapidly [4-5], shown in Fig. 2, because its higher shunt impedance is higher than the IH-DTLs in those energy regions.

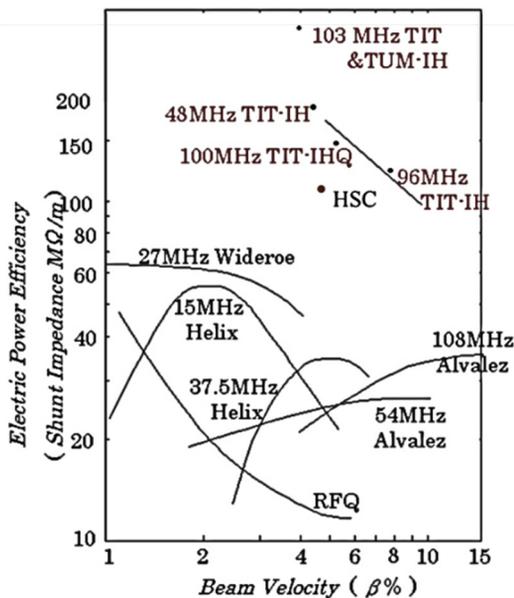


Figure 1: The shunt impedance of the low beta linacs.

Since the DTLs operated in TE<sub>11n</sub> mode of the higher order mode have a property which is suitable to accelerate

\*Work supported by NSFC under Grant No. 11427904, No. 11475232 and No. 11535016

<sup>†</sup> luliang@impcas.ac.cn

ions in medium and high energy region [6], we proposed a 325MHz DTL operated in TE<sub>115</sub> mode. Our proposed HOM-DTL is designed as a prototype buncher and its structure is shown in Fig. 3.

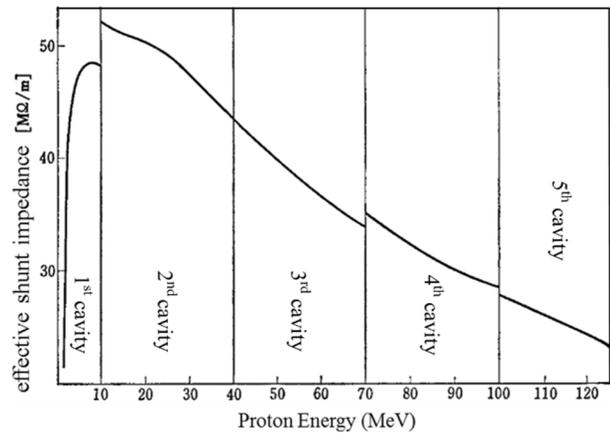


Figure 2: The shunt impedance changing of the Alvarez type DTLs.

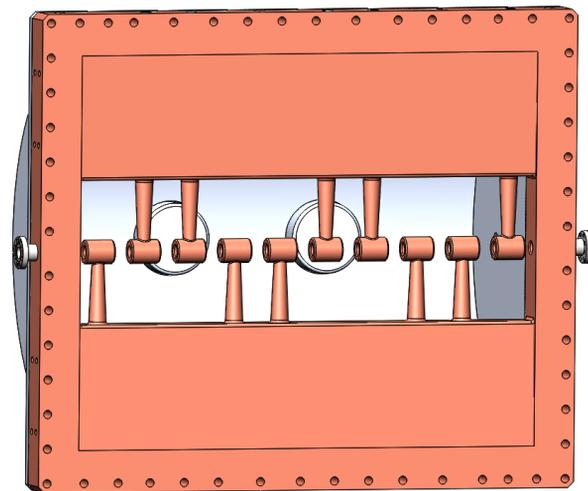


Figure 3: The inner structure of proposed HOM-DTL.

### ELECTROMAGNETIC DESIGN

The frequency of proposed HOM-DTL is 325MHz which is 4th harmonic of the frequency of 81.25MHz. This HOM-DTL is a prototype research for future heavy ion buncher. The estimated peak voltage is rather high as several mega-voltages (MV). The Microwave Studio (MWS) code and ANSYS code are used to calculate the cavity electromagnetic simulation and mechanical simulation [7-8].

Content from this work may be used under the terms of the CC BY 3.0 licence (© 2018). Any distribution of this work must maintain attribution to the author(s), title of the work, publisher, and DOI.

As shown in Fig. 3, the HOM-DTL has drift tubes and ridges that is same to the normal type IH-DTLs with TE<sub>111</sub> mode, however, the resonated frequency of cavity can be tuned to TE<sub>115</sub> mode by configuring directions of the stems. Shown in Fig. 4 and Fig. 5, the biggest feature of the HOM-DTL is that the axial accelerating e fields of every gaps are quiet flat, even in the two end gaps. The flat e field distribution makes the field tuning of cavity very easy. The proposed HOM-DTL adopts 10 stems and 11 gaps, and the total length is 1m. Shown in the Table 1, when the Kilpatrick factor adopts 1.5, the simulated total voltage of the HOM-DTL is 1.93MV, and the shunt impedance of the HOM-DTL is calculated as 91.8 MΩ/m that is higher than other structure linacs in same beam beta region shown in Fig. 1 and normal DTLs shown in Fig. 2. That indicates the proposed 325MHz HOM-DTLs have a better power efficiency in the medium energy region.

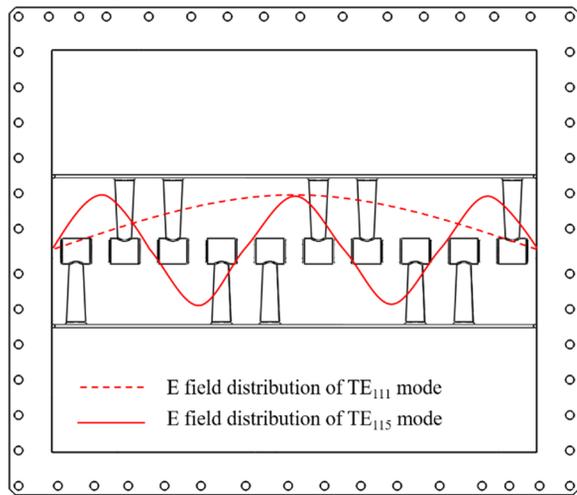


Figure 4: RF property of TE<sub>115</sub> mode (solid line) in the HOM-DTL. Dot line shows a RF property in IH-DTLs.

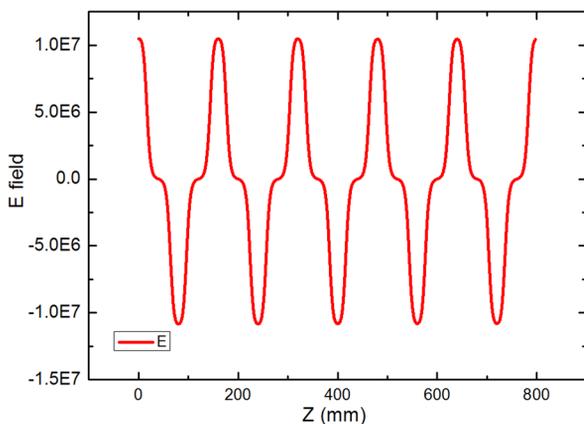


Figure 5: A flat e field distribution of TE<sub>115</sub> mode in the HOM-DTL.

Table 1: The Simulated Parameters of the HOM-DTL

Items	Value
Frequency / MHz	325.008
Gap No.	11
DT No.	10
Cavity diameter / mm	660
Beam bore / mm	20
DT diameter / mm	40
$\beta$ (particle energy)	0.173
Inner length / mm	800
Total voltage / MV	1.93 @ 1.5 Kp.
Dissipated power / kW	50.6 @ 1.5 Kp.
Q value	9167
Shunt impedance / MΩ / m	91.8

Because an existing mail coppery frame (copper-colored part shown in the Fig. 3) was adopted for simulations and fabrications of the 325MHz HOM-DTL, the optimization of the RF structure design is limited. In our opinion, the shunt impedance could be increased 1.5 times of the calculated 91.8 MΩ/m.

The RF properties of proposed HOM-DTL is confirmed by MWS, shown in Fig. 6, according to the resonated TE<sub>11n</sub> order, the frequency shows an uptrend and the Q value shows a downtrend. The downward Q indicates that the RF mode is much higher, the higher RF power is needed. Based on our calculations, the ridges have a big effect to the cavity RF property. The height of the ridges is much higher, meanwhile the stems are more longer, the Q value is more higher. The TE<sub>114</sub> is 308.223MHz, the desired resonated RF mode is 325MHz which is totally separated from the neighbor mode.

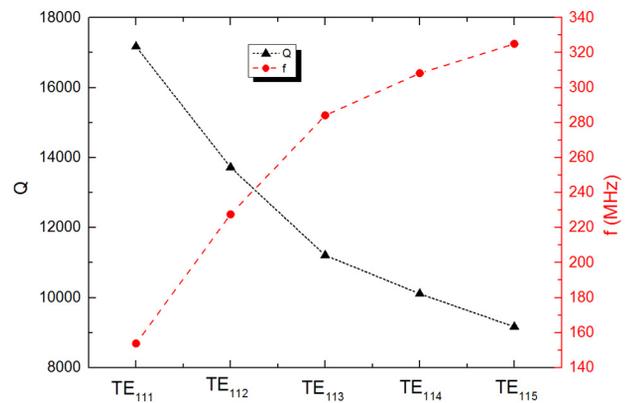


Figure 6: Resonated RF mode and Q values of calculated HOM-DTL. According to the TE<sub>11n</sub> order, the Q shows a downtrend and the frequency shows uptrend.

And same to the normal IH-DTLs, the hottest part of the HOM-DTL is the stem [9]. Shown in Fig. 7, the surface current is concentrate in the stems. Though we are limited by budgets, and the HOM-DTL will be carried out low power test and aimed to test the shaping method without alignment. However, the cooling designs of stems

must be considered for possibilities of future use. According to the ANSYS calculations, with 10 water routes for stem cooling and 10% duty, the maximum deformation is occurred in the cavity (between two tuners) and the maximum temperature is about 400C and is located in the first tube.

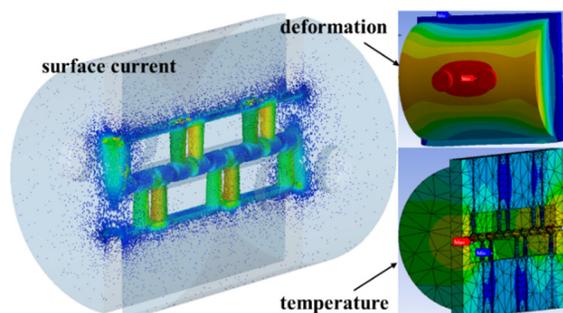


Figure 7: Images of surface current (left part) and multi-physics analysis. The intensity increases as the color changes from blue to yellow and to red.

The frequency tuning is being designed using four tuners. Both side of the main frame has two tuners, and the tuners are uniform distribution in the beam direction. The diameter of tuners is 60mm, and the preset inserting length of the tuners is 35mm. According to our simulations, the adjustment region of frequency is  $\pm 1.56\text{MHz}$  which is enough for frequency tuning.

## FABRICATION

The HOM-DTL is being fabricated in manufacturing company, shown in Fig. 8. However, this research is limited by budget. Although the main frame is being shaped from a block copper by using a numerical-controlled machine tool, the cavity wall is being bent from an aluminum sheet. The stand supports the main frame directly by using two stainless holders. And two tuner-supports fixes the four tuners. The tuners are also made from aluminum material.

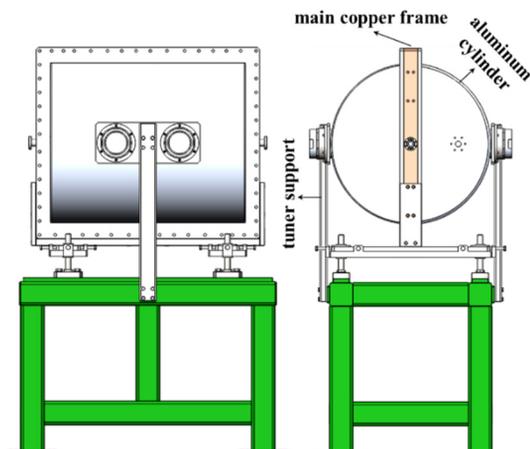


Figure 8: Assembly image of the HOM-DTL. The main frame is made from copper material, the other cavity parts (walls and the tuners) are being made from aluminium material.

## SUMMARY AND FUTURE PLAN

A HOM structure cavity driven by TE115 RF mode was calculated and simulated for high energy beam bunching. Its shunt impedance is higher than IH-DTLs and Alvarez type DTLs in medium energy acceleration. Along the 800mm axis, the designed 325MHz HOM-DTL buncher could induce 1.93MV with flat  $e$  field distribution on the axis. Its shunt impedance is 91.8  $\text{M}\Omega/\text{m}$  in a safe  $K_p$  factor. The core part of the HOM-DTL is being shaped from a copper block, and other parts is being fabricated from aluminium material.

The fabrication and assembly will be finished in the end of this October. Our team will carry out a low power test for measuring the RF properties such as resonated frequency and  $e$  field distribution. Also, we are applying a national natural science foundation of China for future copper fabrication of the cavity wall.

## ACKNOWLEDGEMENTS

Return to our researcher, the authors would like to convey thanks to Prof. Dacheng ZHANG for fruitful discussions and comments on the cavity designs.

## REFERENCES

- [1] T. Ito, N. Hayashizaki *et al.*, “Research of hybrid single cavity linac”, *Nucl. Instrum. Methods Phys. Res. B*, Vol. 261, p. 17-20, Aug. 2007.
- [2] L. Lu, T. Hattori *et al.*, “Design and simulation of C6+ hybrid single cavity linac for cancer therapy with direct plasma injection scheme”, *Nucl. Instrum. Methods Phys. Res. A*, Vol. 688, p. 11-21, Oct. 2012.
- [3] L. Lu, T. Hattori, H.Y. Zhao *et al.*, “High Power Test of an Injector Linac for Cancer Therapy Facilities”, *Phys. Rev. ST Accel. Beams*, vol. 18, p. 111002, Nov. 2015.
- [4] L.W. Alvarez; *Phys. Rev.*, vol. 70, p. 799, 1946.
- [5] M. Heilmann, X. Du, P. Gerhard, L. Groening, M. Kaiser *et al.*, “Design Study for A Prototype Alvarez-Cavity for the Upgraded Unilac”, in *Proc. IPAC'17*, Copenhagen, Denmark, May 2017, pp. 2205-2207
- [6] N. Hayashizaki, T. Hattori, “IH Linac with Higher Order Modes”, in *Proc. EPAC'08*, Genoa, Italy, June 23-27, pp. 3419-3421
- [7] CST Microwave Studio, <http://www.cst.com>
- [8] ANSYS, <https://www.ansys.com/>
- [9] L. Lu, L. P. Sun, T. He, L. Yang, W. Ma *et al.*, “Research on A Two-Beam Type Drift Tube Linac”, in *Proc. LINAC'16*, East Lansing, MI, USA, Sep. 2016, pp. 989-991.